


4

3

2

1

AIR PISTON BEARING ORIENTATION: DEFAULT

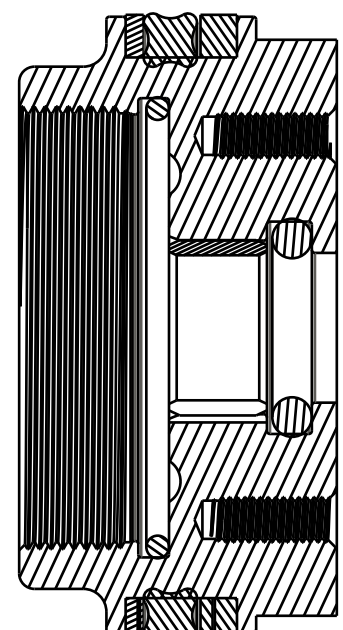

IMPORTANT:
THIN BUSHING TOWARDS
DAMPER BODY SIDE

IMPORTANT:
THICK BUSHING TOWARDS
BEARING CAP SIDE

SECTION A-A

Bearing: (T) External [1.111 W X 1.630 OD X .047 TH, Ø1.640 Bore] TFM, Split

Bearing: (T) External [1.111 W X 1.630 OD X .095 TH, Ø1.640 Bore] TFM, Split

GREASE:
THIN LAYER
OF SLICK HONEY

QUAD SEAL

Seals: O-Ring [27.5mm ID X 1.5mm CS] Metric, N-70, Static

Bearing: Internal [Ø.375 Shaft x .457 OD, .190 TLG]

BEARING HOUSING

O-Ring [(-110) 0.103 C.S. X 0.362 ID]

GREASE:
THIN LAYER
OF SLICK HONEY

010-01-000
Ball [Ø 0.1250] Steel

018-01-034
Set Screw [#8-32 X 0.125 TLG] Flat Point, SS

FOX FOX Factory, Inc. Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
Assy Dwg: Bearing Assy: Float, 2024
[1.026 Bore, 1.640 Bore, .375 Shaft]

SIZE DWG. NO. **812-06-110-KIT**

PLOT SCALE 2:1 SHEET 1 OF 2

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

ProE ASSEM