


4

3


2

1

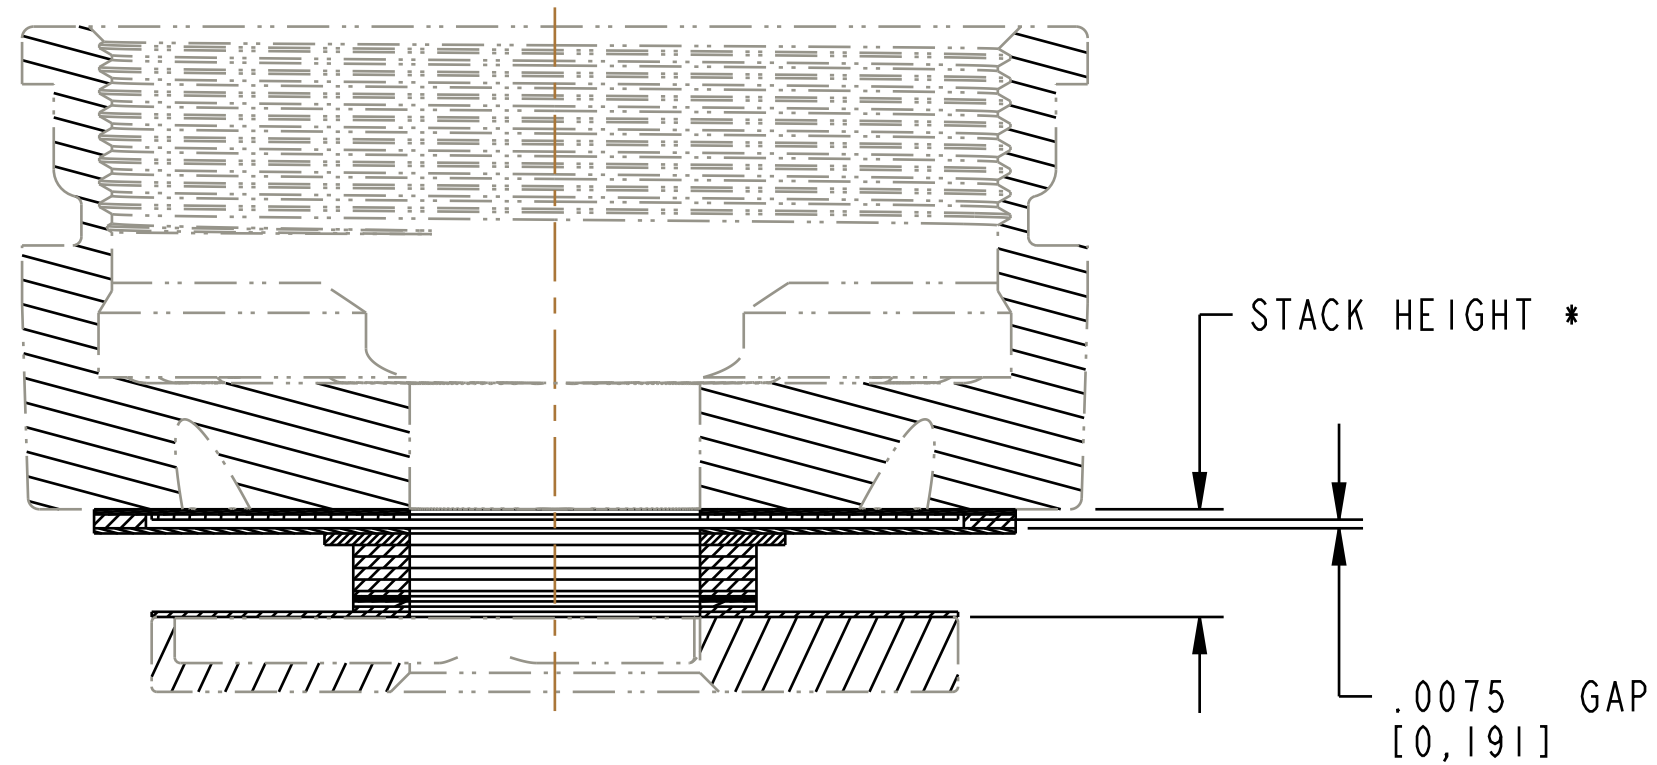

SECTION A-A  
SCALE 6:1

STATE	STACK HEIGHT	MIN. STACK HEIGHT	MAX. STACK HEIGHT
FREE	.0935 [2,375]	.0915 [2,324]	.0955 [2,426]
INSTALLED	.0860 [2,184]	.0840 [2,134]	.0880 [2,235]

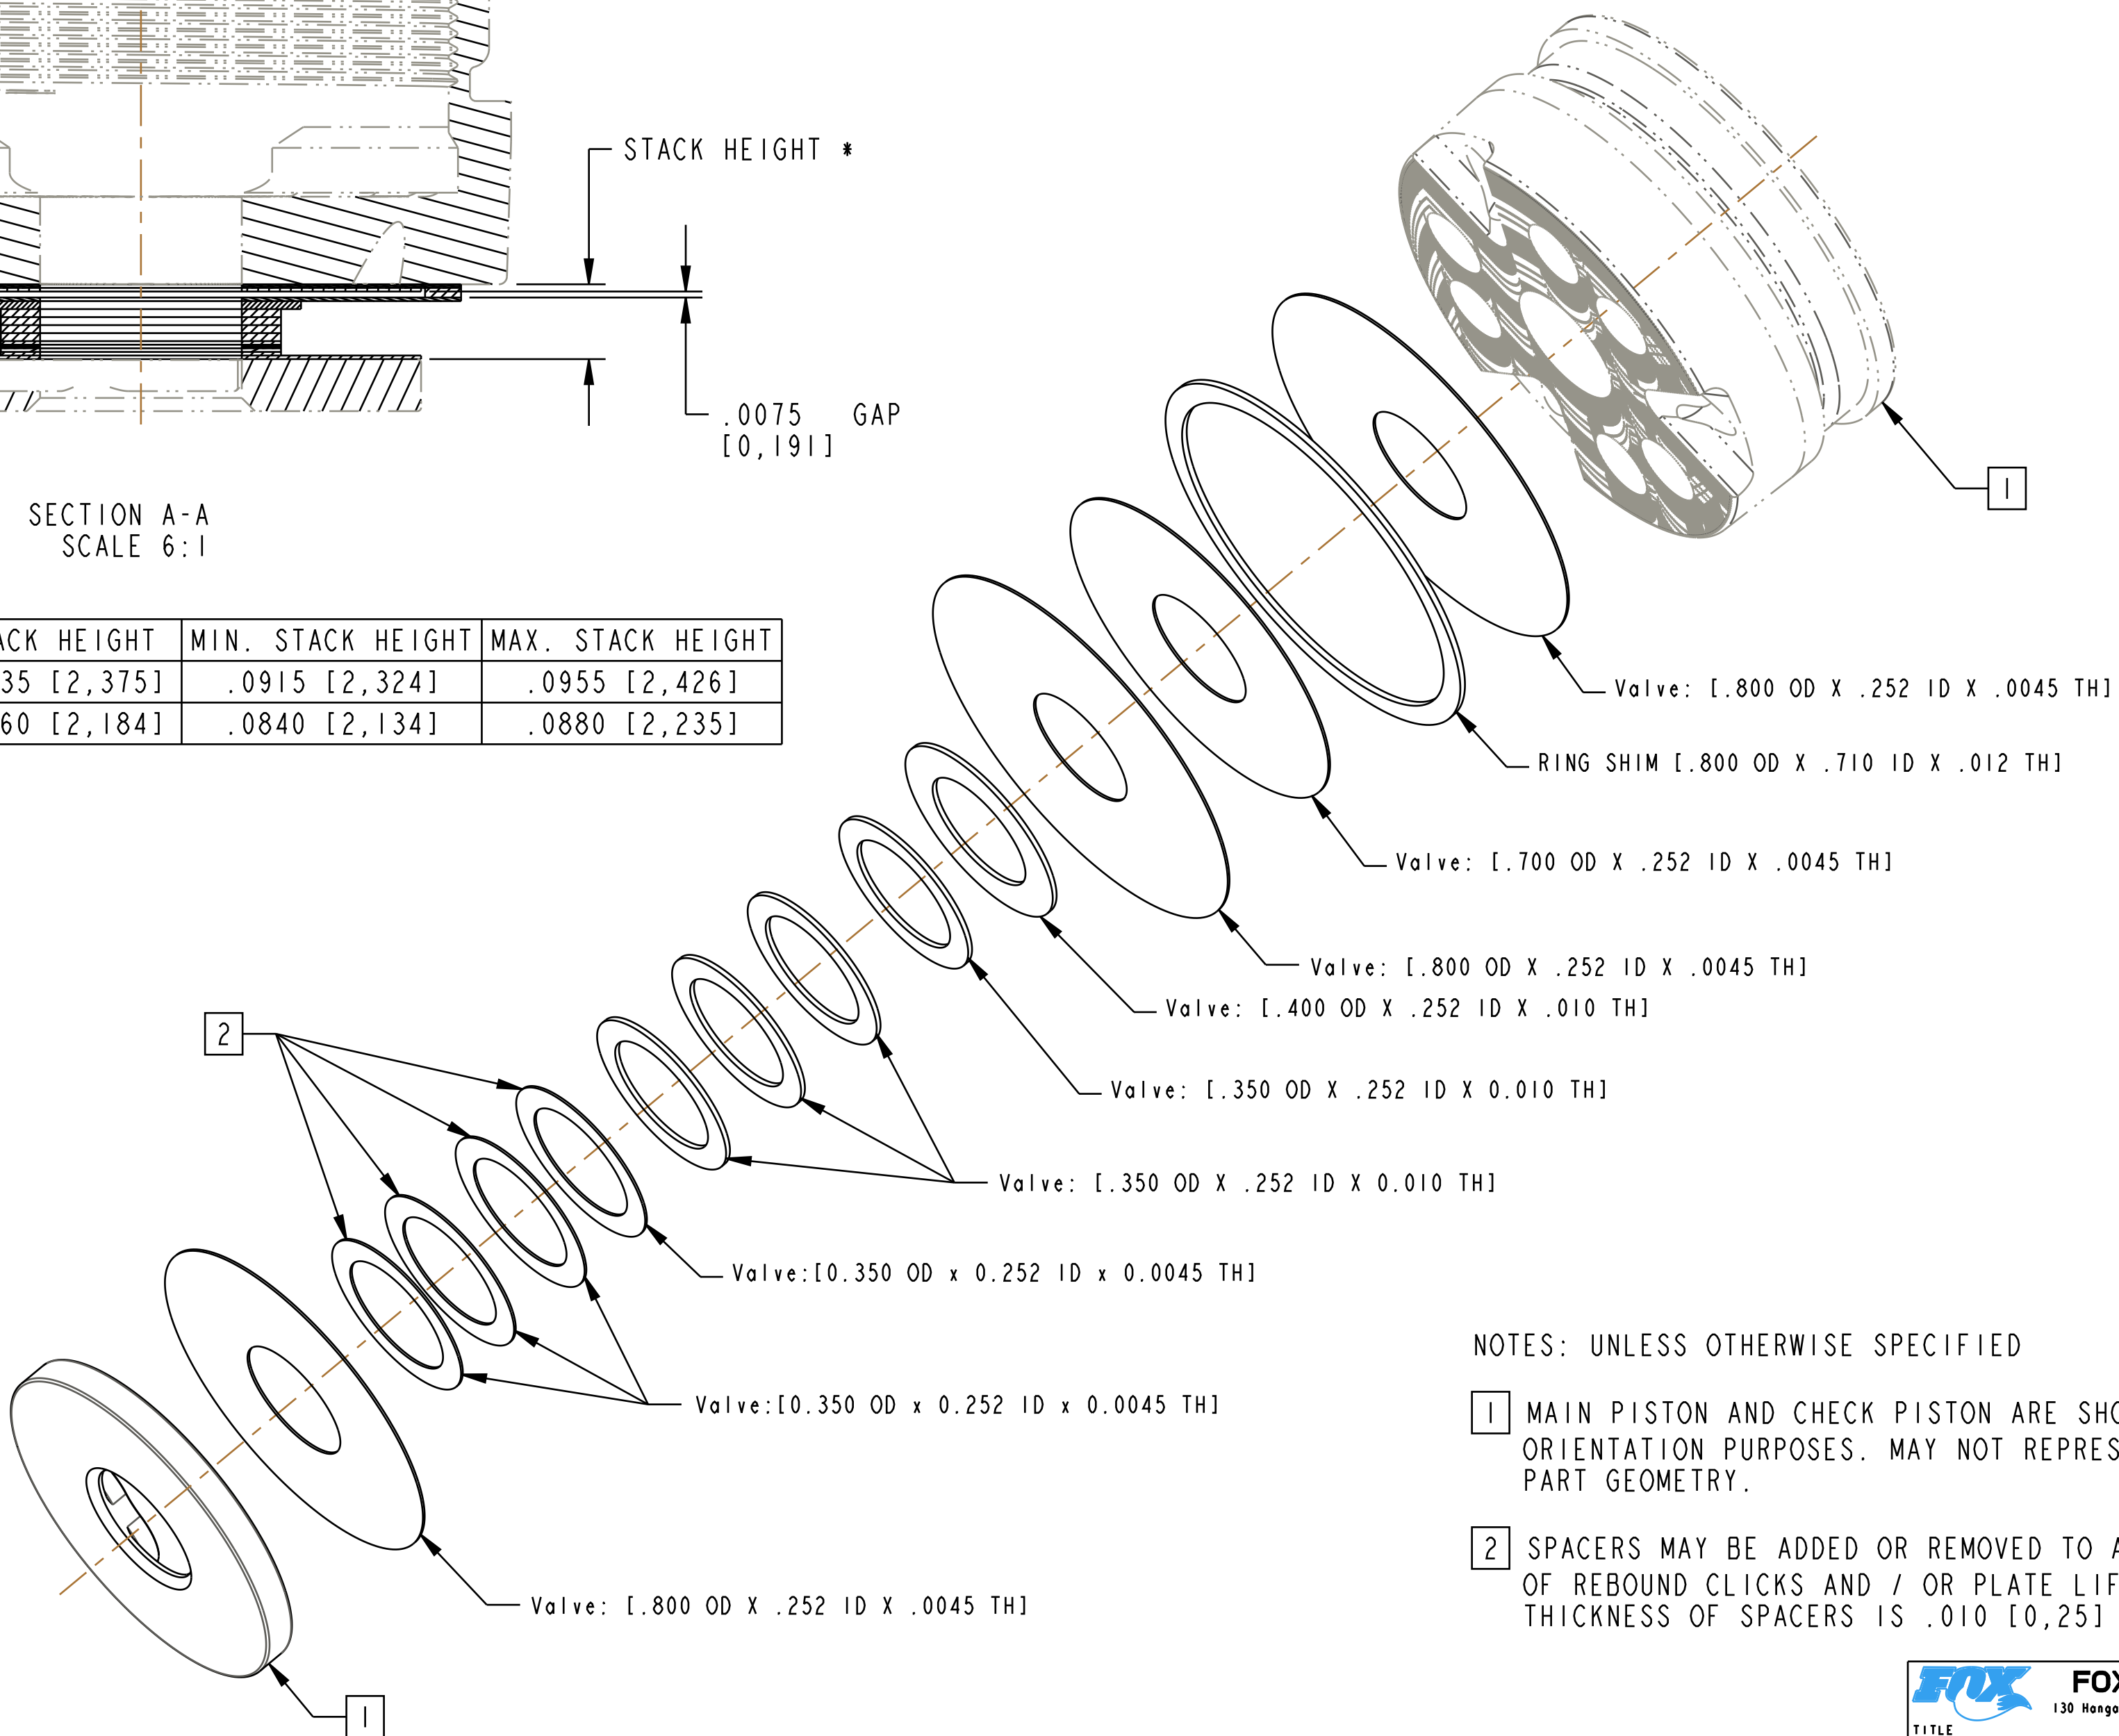

NOTES: UNLESS OTHERWISE SPECIFIED

- 1 MAIN PISTON AND CHECK PISTON ARE SHOWN FOR ORIENTATION PURPOSES. MAY NOT REPRESENT ACTUAL PART GEOMETRY.
- 2 SPACERS MAY BE ADDED OR REMOVED TO ADJUST NUMBER OF REBOUND CLICKS AND / OR PLATE LIFT. MINIMUM THICKNESS OF SPACERS IS .010 [0,25] (QTY: 1, 044-10-035).

- PROPRIETARY -  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

**FOX Factory, Inc.** Ph 831-768-1100  
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE  
Valve Stack Assy: 2024 Float SL  
[.940 Bore], Compression, CDL01

SIZE DWG. NO. **805-05-668-KIT**

PLOT SCALE 4:1 SHEET 1 OF 1

4

3

2

1