

4

3

2

1

029-03-024-A  
O-RING

GREASE:  
THIN LAYER  
OF SLICK HONEY

TOPCAP

060-00-018  
Pin: Dowel [Ø 0.125 X 0.250 TLG]

IMPORTANT:  
ALIGN PIN WITH  
BLIND HOLE IN TOPCAP

210-22-824  
FLOW DIVIDER

029-08-004  
Seals: O-Ring [3.0MM ID x 1.0MM CS] Metric, N-70, Static

TORQUE:  
75±5 IN. LB.

210-22-594  
Flow Plate, 2013 CTD, F/P

210-22-595  
Hard Stop Plate, 2013 CTD, F/P

GREASE:  
THIN LAYER  
OF SLICK HONEY

GREASE:  
SLICK HONEY

GREASE:  
THIN LAYER  
OF SLICK HONEY

TORQUE:  
11±3 IN.LB.

060-00-019  
Pin: Dowel [Ø 0.078 X 0.188 TLG]


210-22-762  
Compression Adjuster Rod, 2014 FIT CTD

Seals: O-Ring [3.0MM ID x 1.0MM CS] Metric, N-70, Static

029-08-004

019-01-023

Fastener, Standard (Metric): Hexagon Socket, Flanged Button Hd Cap Screw, M3 X 8mm

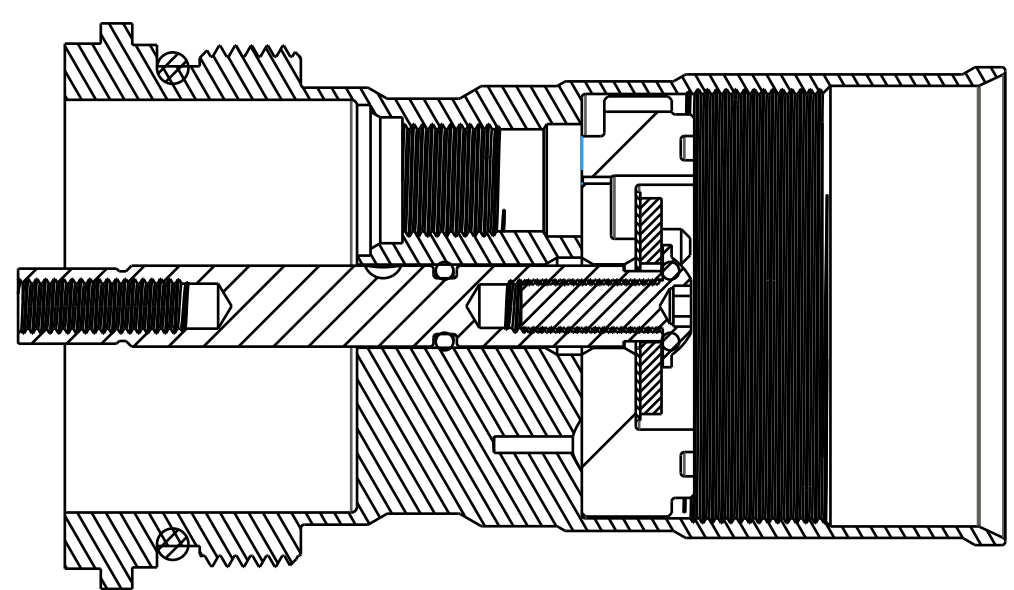

		<b>FOX Factory, Inc.</b>		Ph 831-768-1100
TITLE		130 Hangar Way, Watsonville, CA 95076 USA		Fax 831-768-9312
<b>2015 36 Remote FIT CTD Topcap Assy</b>				
SIZE	DWG. NO.			
<b>C</b>				
PLOT SCALE 2.00:1		SHEET 1 OF 1		

- PROPRIETARY -  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

ProE ASSEM