

4

3

2

1

D

D

C


C

B

B

A

A

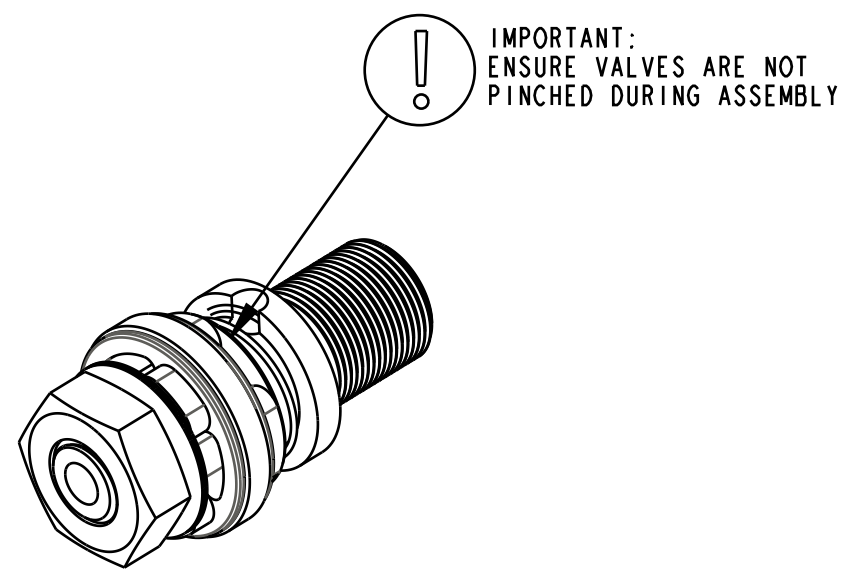

DETAIL A  
SCALE 2.000

GREASE:  
THIN LAYER OF SLICK HONEY  
ON BULLET TOOL

GREASE:  
THIN LAYER  
OF SLICK HONEY

LOCTITE:  
ONE DROP  
RED 262

TORQUE:  
30±5 IN. LB.

GREASE:  
THIN LAYER  
OF SLICK HONEY

029-08-047  
BASE STUD O-RING

210-22-755  
BASE STUD

GREASE:  
THIN LAYER  
BLUE MARINE GREASE

010-01-012  
Ball [Ø.1094]

039-00-344  
Spring: Detent [.12 TLG X .094 OD X 236 lb/in] SS

REBOUND ADJUST NEEDLE

029-08-026  
Seals: O-Ring [2.0 MM ID x 1.5 MM CS] Metric, N-60, Static


820-03-464-KIT  
2016 FIT4 Bearing Housing Assy

SEE DETAIL A

DAMPER SHAFT

820-03-465-KIT  
REBOUND PISTON ASSY

TORQUE:  
30±5 IN. LB.

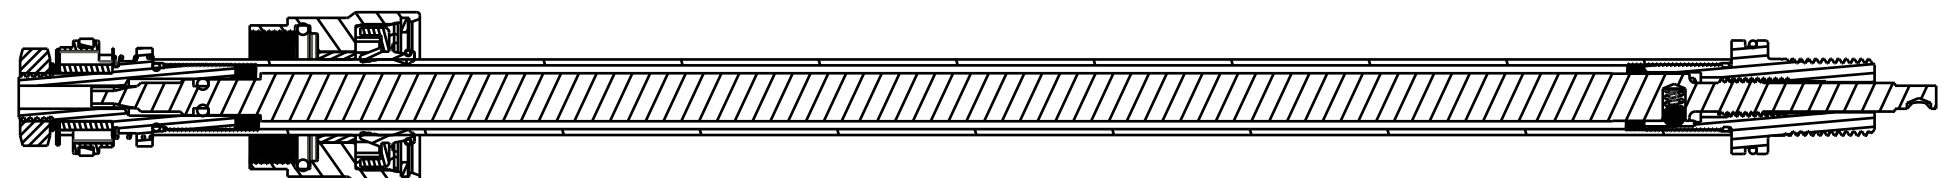

SECTION A-A

PROPRIETARY  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

**FOX** Factory, Inc. Ph 831-768-1100  
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE  
**RETRO 34mm 2016 FIT4  
Damper Shaft Assy**

SIZE DWG. NO.  
**C**

PLOT SCALE | .00 : 1 | SHEET | OF | 1

4

3

2

1