

4

3

2

1

D

D

C


C

B

B


A

A

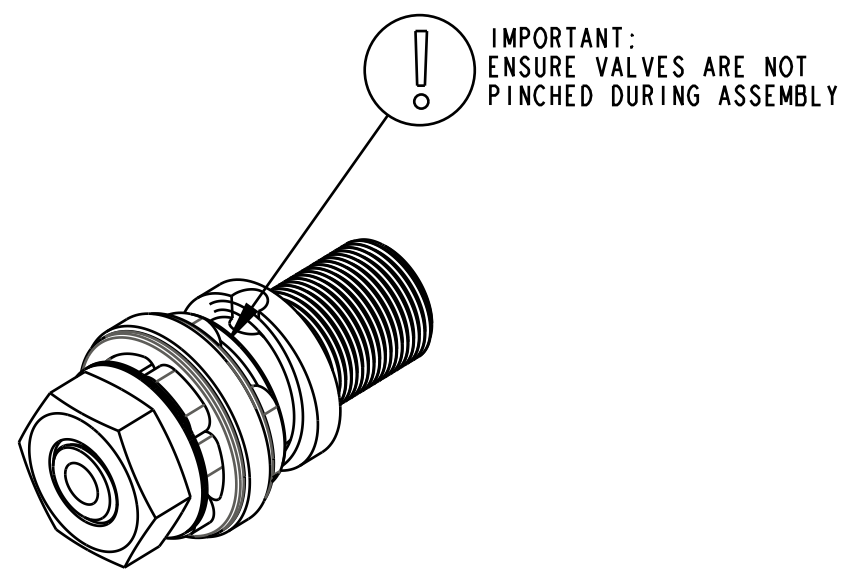


DETAIL A
SCALE 2.000

SEE DETAIL A



REBOUND PISTON ASSY

TORQUE:
30±5 IN. LB.

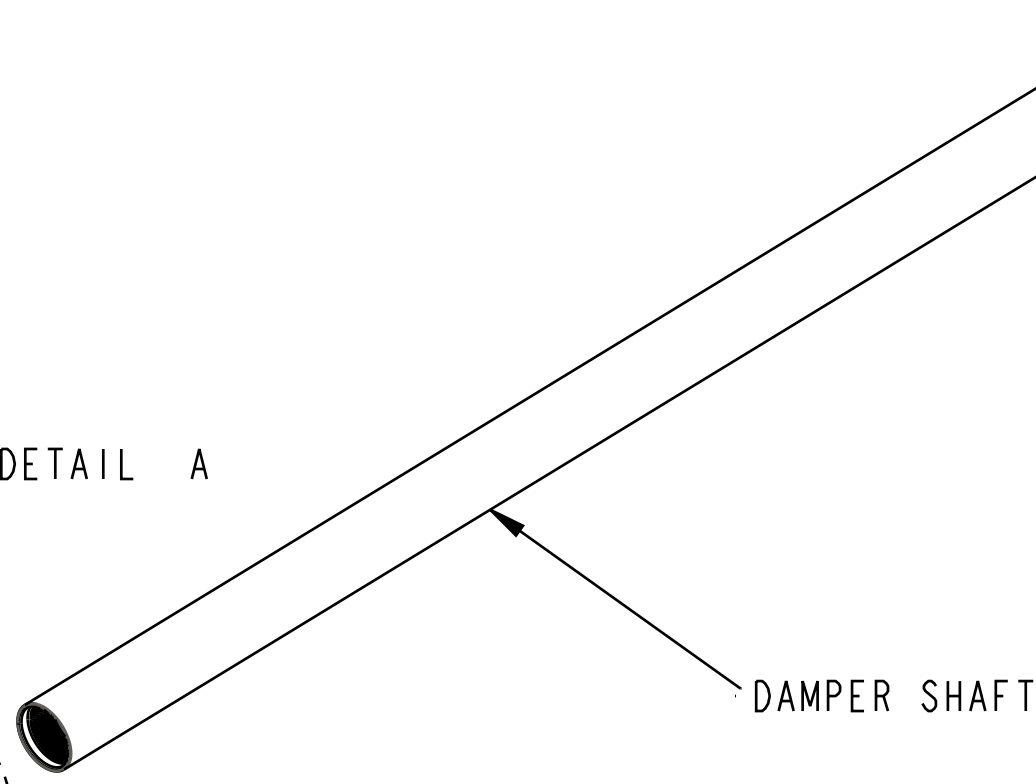


DAMPER SHAFT


GREASE:
THIN LAYER OF SLICK HONEY
ON BULLET TOOL

GREASE:
THIN LAYER
OF SLICK HONEY

820-03-464-KIT
2016 FIT4 Bearing Housing Assy

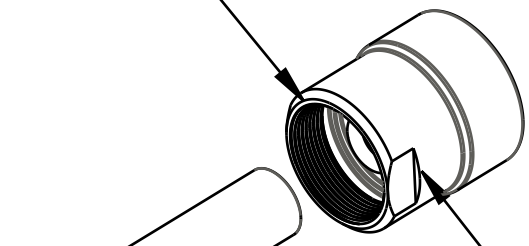

029-08-026

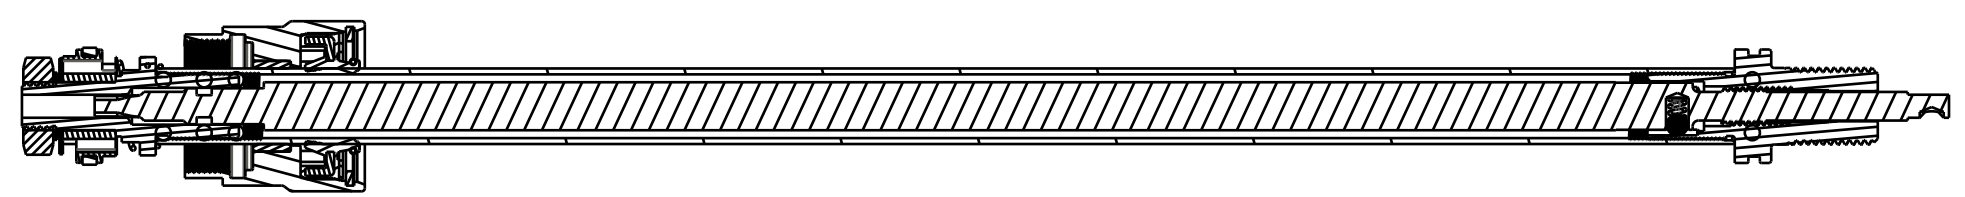

SECTION A-A

LOCTITE:
ONE DROP
RED 262

TORQUE:
30±5 IN. LB.

GREASE:
MEDIUM LAYER OF BLUE MARINE
GREASE TO FULL 360° OF THREADS

GREASE:
THIN LAYER
OF SLICK HONEY

029-08-022
BASE STUD O-RING

210-22-712
BASE STUD

GREASE:
THIN LAYER BLUE MARINE
GREASE TO BALL

010-01-012
Ball [Ø.1094]

039-00-344

Spring: Detent [.12 TLG X .094 OD X 236 lb/in] SS

REBOUND ADJUST NEEDLE

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

	FOX Factory, Inc. 130 Hangar Way, Watsonville, CA 95076 USA Ph 831-768-1100 Fax 831-768-9312	
	2016 FIT4 Damper Shaft Assy	
TITLE C	DWG. NO.	SHEET 1 OF 1
PLOT SCALE .00:1	ProE ASSEM	