


4

3

2

1

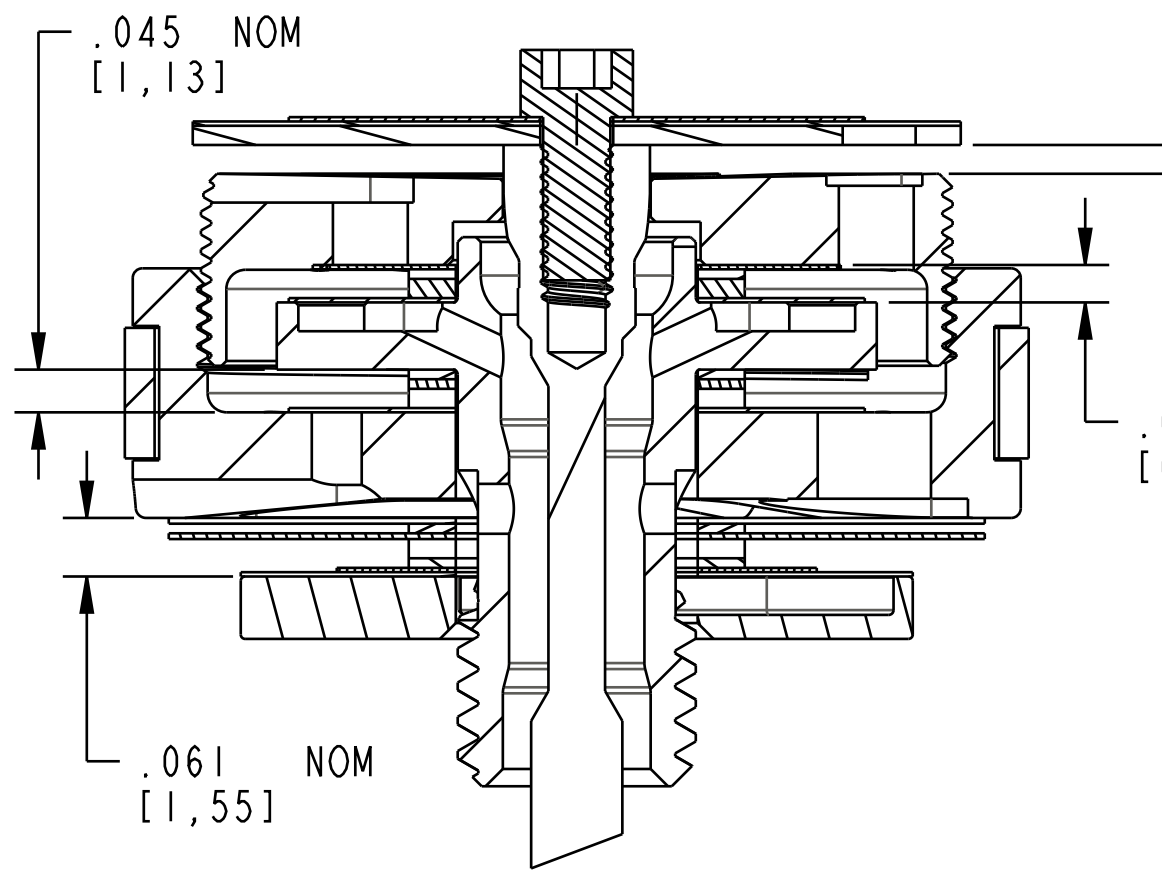

.030-.047 [0,77-1,19]
 PLATE LIFT FROM CLOSED TO MIDDLE POSITION, ALL NON REMOTES + 1RD

.072-.090 [1,83-2,29]
 PLATE LIFT FROM CLOSED TO OPEN POSITION, ALL CABLE REMOTES EXCEPT NOTE [5]

[5] USE .030-.047 LIFT SPEC FROM CLOSED TO OPEN FOR REMOTES WITH 210-30-090 CAM (TREK)

.039 [0,99]

222-01-297
 Piston: Lockout, Float DPS [.200 TLG, M20 X 0.5] 416SS

210-10-104
 Piston Bolt: Dish WRD w/ check [1/4-28 X 5/8 Hex]

TORQUE:
 22±2 IN.LB.
 Custom socket: 398-00-638

TORQUE:
 60±5 IN.LB.
 Custom Socket: 398-00-637

[2] 044-20-035
 Valve: [.350 OD X .252 ID X .020 TH]

[2] 044-10-035
 Valve: [.350 OD X .252 ID X 0.010 TH]

044-04-050
 Valve: [.500 OD X .252 ID X .0045 TH]

044-04-070
 Valve: [.700 OD X .252 ID X .0045 TH]

210-10-098
 Damping Adjust Part: Float MY2013 Check Piston [.740 OD X .252 ID X .110 TH]

805-02-031
 Piston Assembly: 2016 Float DPS, [Ø 0.940 Bore] w/ Glyde Ring

- NOTES: (UNLESS OTHERWISE SPECIFIED)
- 1. SHOCK SHOULD HAVE 12-15 REBOUND CLICKS
 - [2] 1 OR 2 SPACERS MAY BE ADDED OR REMOVED TO ADJUST NUMBER OF REBOUND CLICKS .030" MIN SPACING
 - [3] 1 OR 2 SPACERS MAY BE ADDED OR REMOVED TO ADJUST NUMBER OF REBOUND CLICKS .010" MIN SPACING
 - [4] 1 OR 2 SPACERS MAY BE ADDED OR REMOVED TO ADJUST LOCKOUT PLATE LIFT .010" MIN SPACING

- PROPRIETARY -
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
 THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
 FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX Factory, Inc. Ph 831-768-1100
 130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
**Valving Assy: 2016 Float DPS,
 CXL, RL, CML [.940 Bore]**

SIZE DWG. NO.
C 807-06-170-KIT

PLOT SCALE 2.00:1 SHEET 1 OF 1

4

3

2

ProE ASSEM