


DETAIL A  
SCALE 2.000

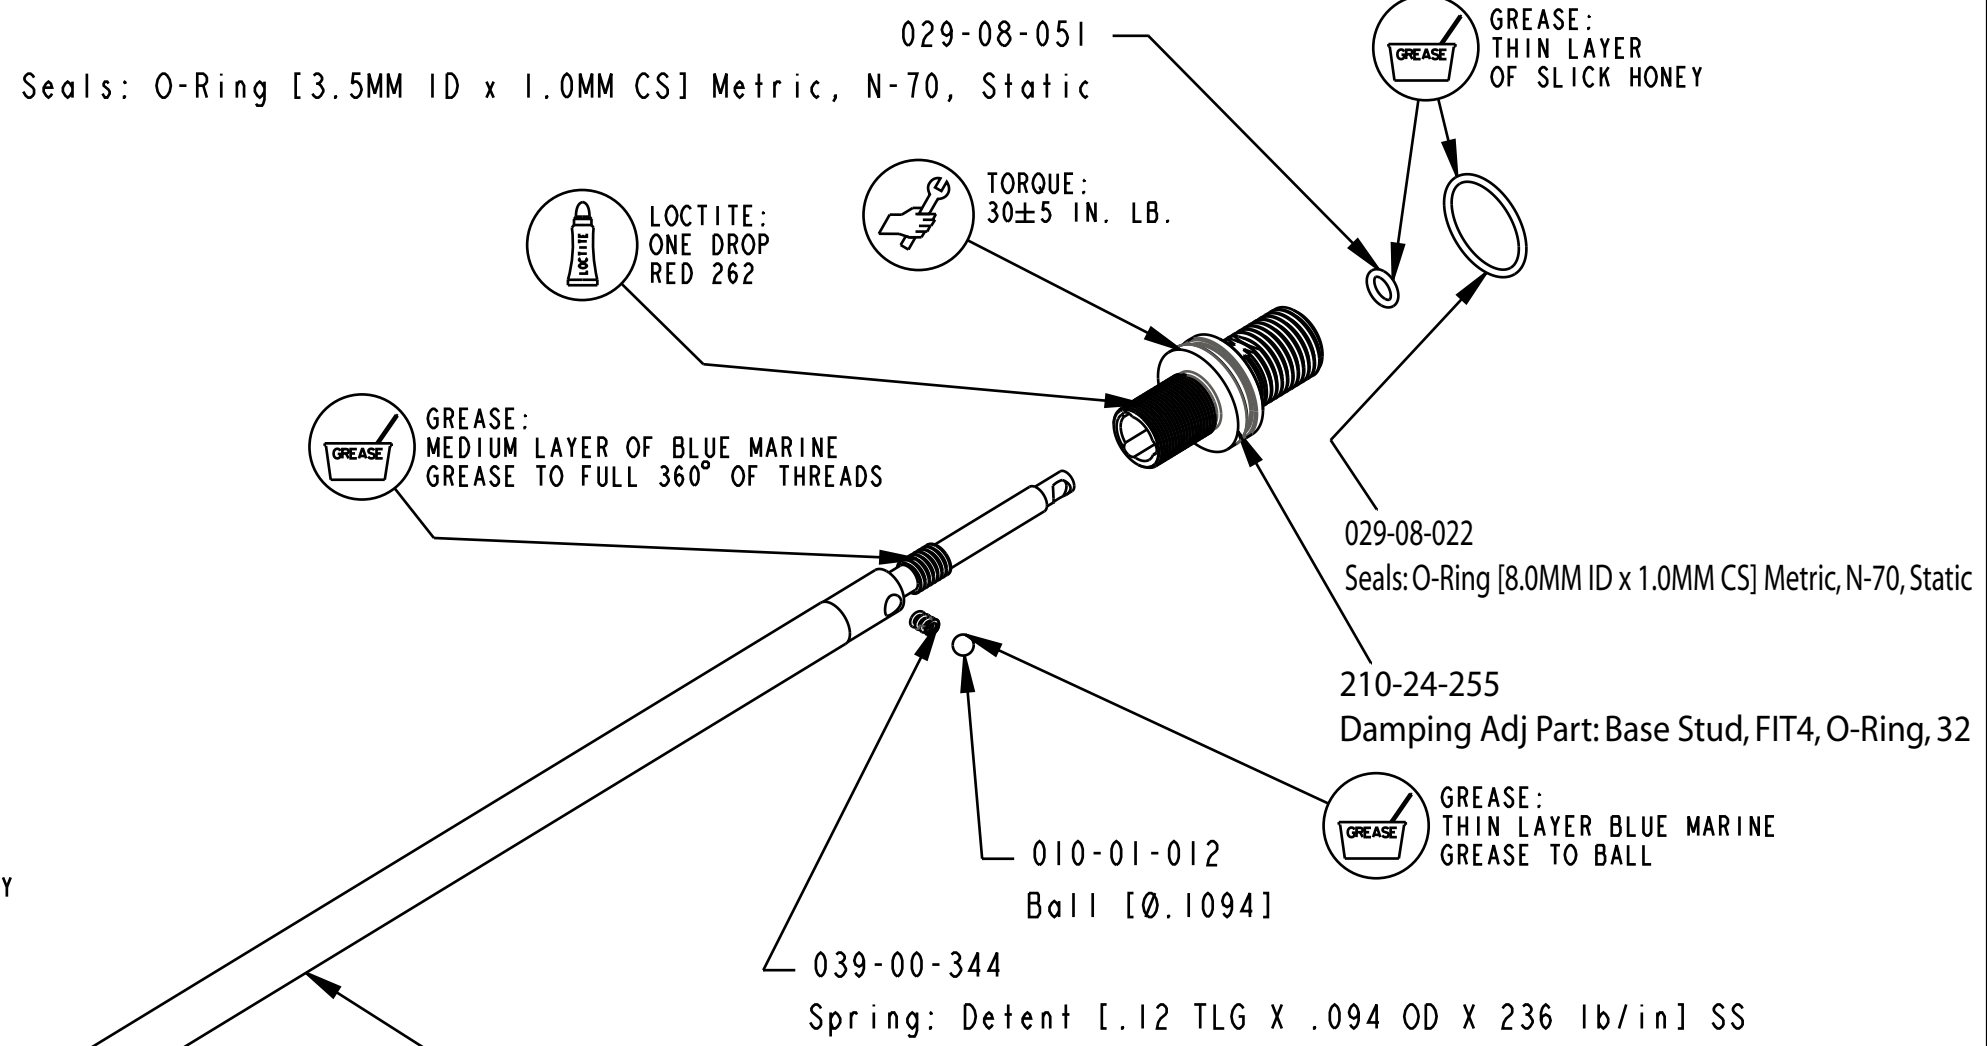


GREASE: THIN LAYER OF SLICK HONEY ON BULLET TOOL

GREASE: THIN LAYER OF SLICK HONEY

Rebound Needles:  
210-22-890: Rebound Adjust Needle, All MY, 32mm 26/27.5 Chassis, FIT4  
210-22-894: Rebound Adjust Needle, All MY, 32mm F29 Chassis, FIT4

029-08-026  
Seals: O-Ring [2.0 MM ID x 1.5 MM CS] Metric, N-60, Static

820-03-464-KIT  
2016 FIT4 Bearing Housing Assy

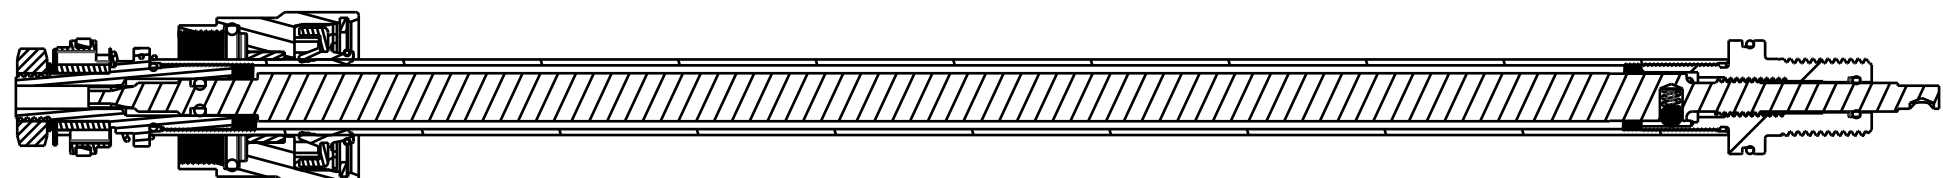

SECTION A-A

Damper Shafts:  
229-10-130: (T) Shaft, Damper, 10mm, All MY, 32mm Chassis 26/27.5, FIT4  
229-10-134: (T) Shaft, Damper, 10mm, All MY, 32mm Chassis, F29, FIT4

SEE DETAIL A

820-03-486-KIT  
2016 FIT4 Rebound Piston Assy, Short Travel

TORQUE:  
30±5 IN. LB.

PROPRIETARY -  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

		<b>FOX Factory, Inc.</b>	Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA		Fax 831-768-9312	
TITLE <b>2016 32mm 26in/27.5in/29in FIT4 Damper Shaft Assemblies</b>			
SIZE	DWG. NO.		
<b>C</b>			
PLOT SCALE	1.00 : 1		SHEET 1 OF 1