

4

3

2

1

D

D

C


C

B


B

A

A

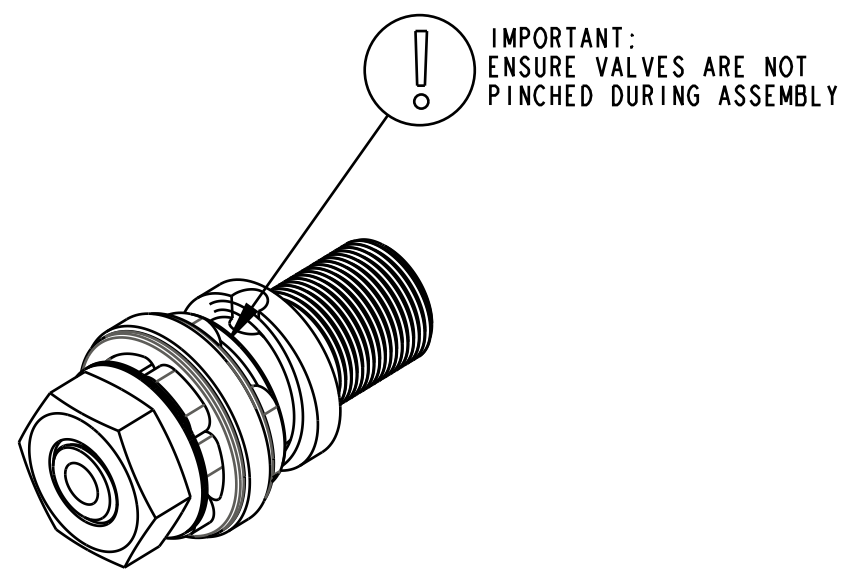

DETAIL A  
SCALE 2.000

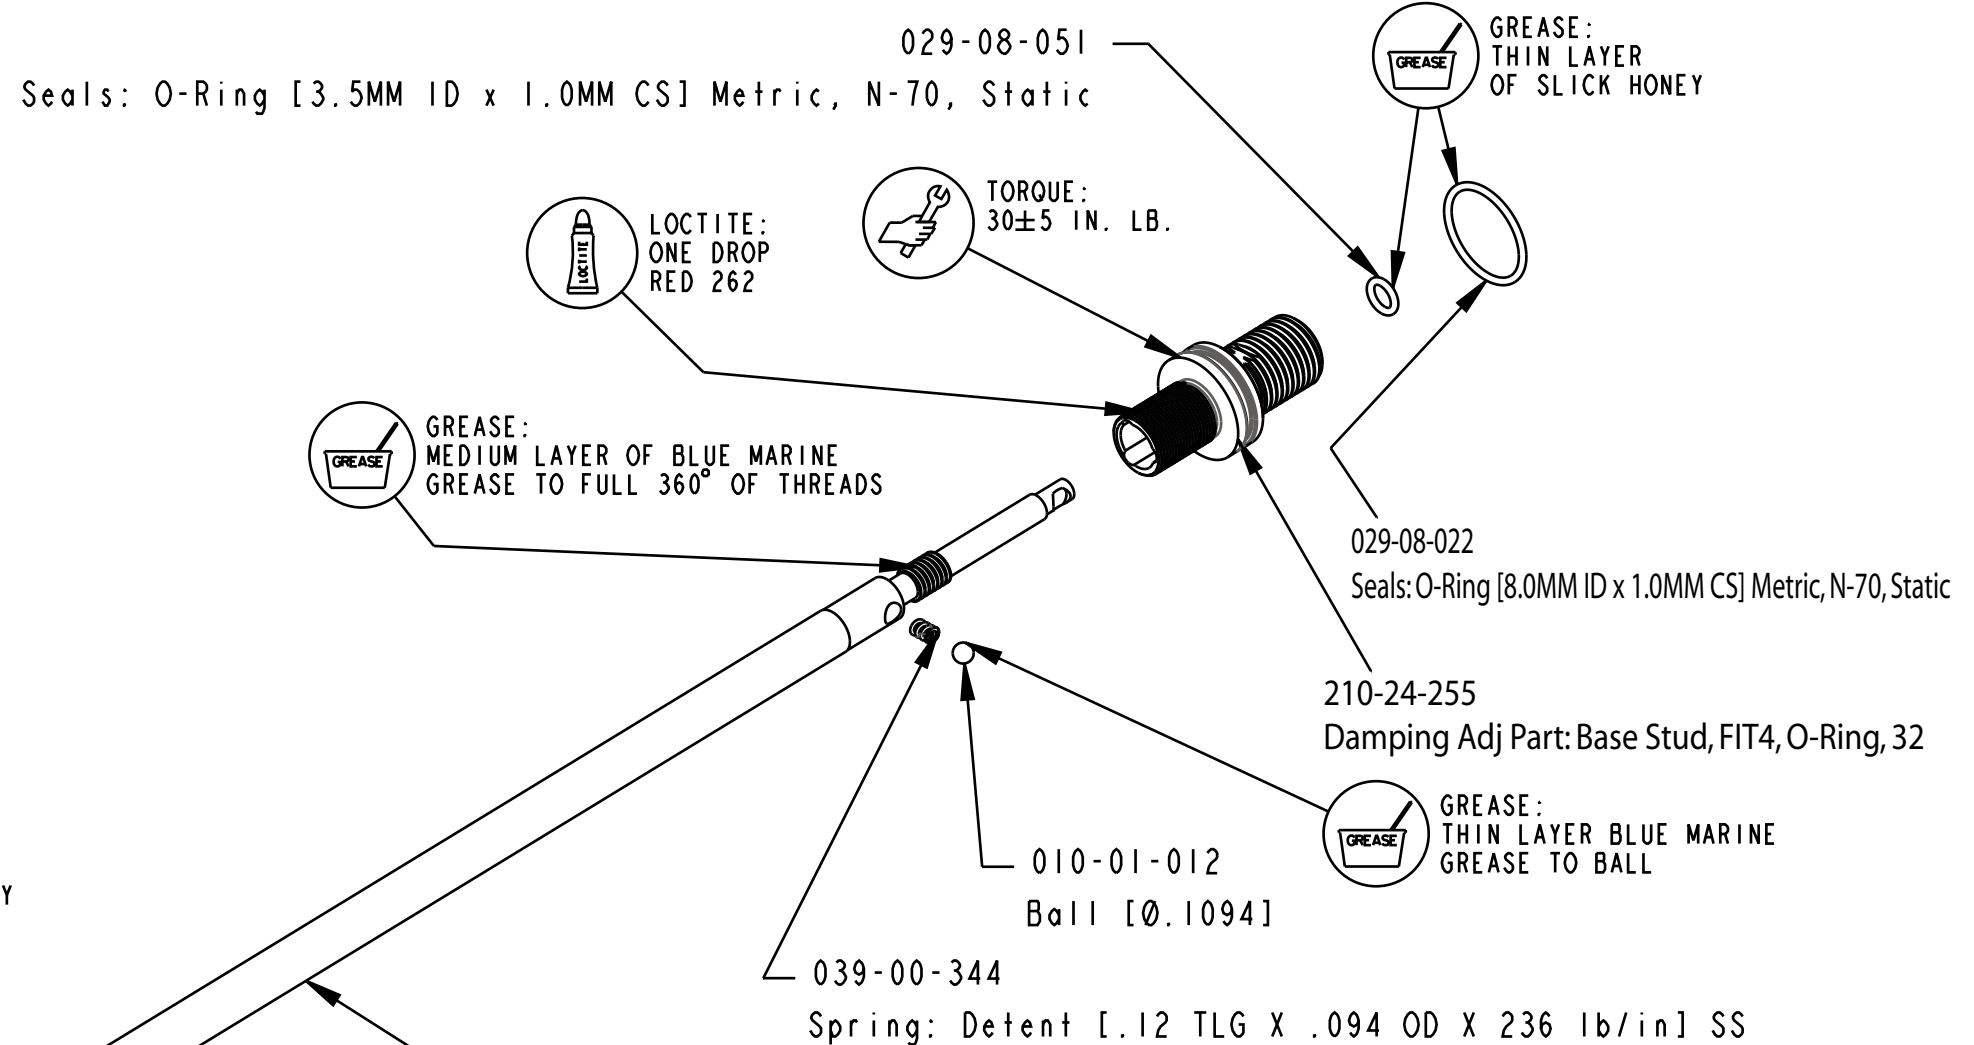

GREASE: THIN LAYER OF SLICK HONEY ON BULLET TOOL

GREASE: THIN LAYER OF SLICK HONEY

Rebound Adjust Needles:  
210-22-890: Rebound Adjust Needle, All MY, 32mm 26/27.5 Chassis, FIT4  
210-22-894: Rebound Adjust Needle, All MY, 32mm F29 Chassis, FIT4


029-08-026  
Seals: O-Ring [2.0 MM ID x 1.5 MM CS] Metric, N-60, Static

820-03-464-KIT  
2016 FIT4 Bearing Housing Assy

Damper Shafts:  
229-10-130: (T) Shaft, Damper, 10mm, All MY, 32mm Chassis 26/27.5, FIT4  
229-10-134: (T) Shaft, Damper, 10mm, All MY, 32mm Chassis, F29, FIT4

Rebound Piston Assemblies:  
820-03-465-KIT 2016 FIT4 Rebound Piston Assy  
820-03-486-KIT 2016 FIT4 Rebound Piston Assy, Short Travel

TORQUE: 30±5 IN. LB.

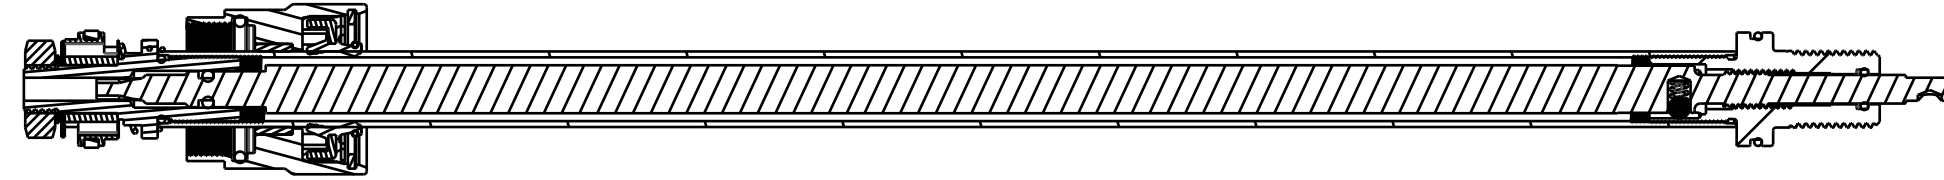

SECTION A-A

PROPRIETARY - THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

**FOX Factory, Inc.** Ph 831-768-1100  
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE: **2016 32mm 26in/27.5in/29in FIT4 Damper Shaft Assemblies**

SIZE DWG. NO. **C**

PLOT SCALE | .00 : 1 | SHEET 1 OF 1

4

3

2

1

ProE ASSEM