

Topcap Assemblies:
 820-05-430-KIT: Topcap Assy, FLOAT LC NA 2, 32, Black Ano, Hollow Volume Spacer, 22cc
 820-05-431-KIT: Topcap Assy, FLOAT LC NA 2, 32, Black Ano, Hollow Volume Spacer, 33cc

241-00-005
 Fastener, Custom: Nut, Bottom, R_RL_RLC

241-01-002
 Fastener, Custom: Crush Washer, Plastic, R_RL_RLC

038-00-091
 Retaining Ring: Internal, Smalley EH-29-S02, 302 SS

IMPORTANT:
 INSPECT 100% THAT RETAINING RING IS FULLY INSTALLED INTO GROOVE FULL 360°

TORQUE:
 50±5 IN. LB.
 (INTO FORK CHASSIS)

Air Shaft Assemblies:
 820-02-428-KIT: Air Shaft Assy, 2018, 32, 80mm, FLOAT LC NA 2, 1.117 Bore
 820-02-429-KIT: Air Shaft Assy, 2018, 32, 90mm, FLOAT LC NA 2, 1.117 Bore
 820-02-430-KIT: Air Shaft Assy, 2018, 32, 100mm, FLOAT LC NA 2, 1.117 Bore
 820-02-431-KIT: Air Shaft Assy, 2018, 32, 26in 110mm, FLOAT LC NA 2, 1.117 Bore
 820-02-432-KIT: Air Shaft Assy, 2018, 32, 26in 120mm, FLOAT LC NA 2, 1.117 Bore

APPLY GREASE AROUND PISTON, ON AIR SHAFT, BETWEEN BUMPER AND NEG PLATE, AND A THIN LAYER ON ENTIRE LENGTH OF PISTON BORE OF UPPER TUBE ID.



029-03-008
 O-Ring (-008) [.070 C.S. X .176 ID]

GREASE:
 THIN LAYER
 OF SLICK HONEY

234-04-881
 Air Cap, FLOAT NA 2, 32 & 34, Blue Ano

TORQUE:
 220±5 IN. LB.
 (INTO FORK CHASSIS)

234-04-811
 Volume Spacer, FLOAT NA 2, 32

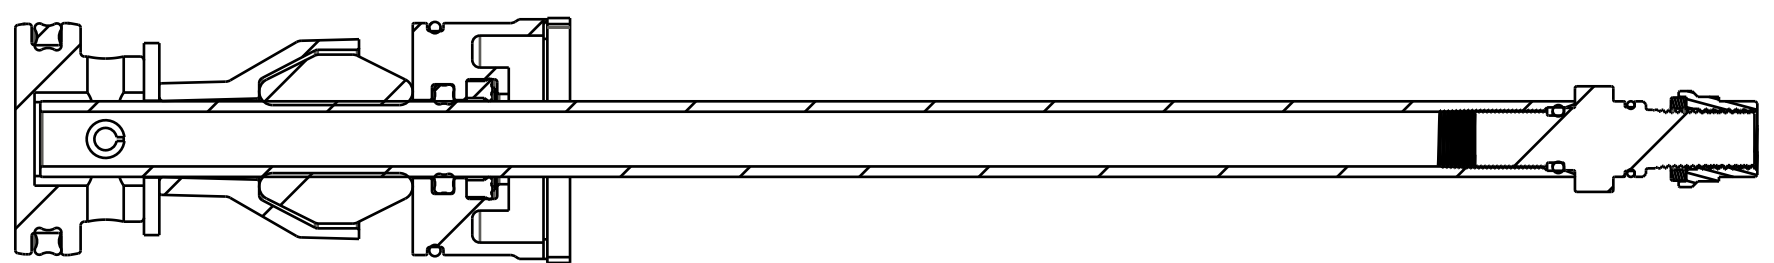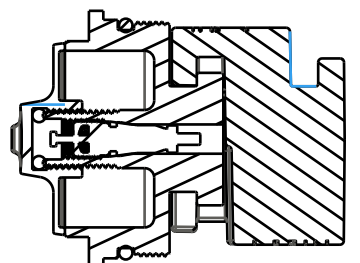

SECTION A-A

- PROPRIETARY -
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
 THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
 FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX Factory, Inc. Ph 831-768-1100
 130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
2018 32mm 26in/27.5in 80-120 FLOAT NA2 1.117 Bore Air Spring Assemblies

SIZE DWG. NO.
C

PLOT SCALE | .00 : 1 | SHEET | OF |