

4

3

2

1

Topcap Assemblies:
 820-05-418-KIT: Topcap Assy, 2018, FLOAT LC NA 2, 32, Black
 820-05-430-KIT: Topcap Assy, FLOAT LC NA 2, 32, Black Ano, Hollow Volume Spacer, 22cc
 820-05-431-KIT: Topcap Assy, FLOAT LC NA 2, 32, Black Ano, Hollow Volume Spacer, 33cc

241-00-005
 Fastener, Custom: Nut, Bottom, R_RL_RLC

241-01-002
 Fastener, Custom: Crush Washer, Plastic, R_RL_RLC

038-00-091
 Retaining Ring: Internal, Smalley EH-29-S02, 302 SS

TORQUE:
 50±5 IN. LB.
 (INTO FORK CHASSIS)

IMPORTANT:
 INSPECT 100% THAT RETAINING RING
 IS FULLY INSTALLED INTO GROOVE FULL 360°

029-03-008
 O-Ring (-008) [1.070 C.S. X .176 ID]

Air Shaft Assemblies:
 820-02-419-KIT: Air Shaft Assy, 2018, 32, 29in 130mm, FLOAT LC NA 2, 1.110 Bore
 820-02-423-KIT: Air Shaft Assy, 2018, 32, 26in & 27.5in 110mm, 29in 80mm, FLOAT LC NA 2, 1.110 Bore
 820-02-424-KIT: Air Shaft Assy, 2018, 32, 26in & 27.5in 120mm, 29in 90mm, FLOAT LC NA 2, 1.110 Bore
 820-02-425-KIT: Air Shaft Assy, 2018, 32, 29in 100mm, FLOAT LC NA 2, 1.110 Bore
 820-02-426-KIT: Air Shaft Assy, 2018, 32, 29in 110mm, FLOAT LC NA 2, 1.110 Bore
 820-02-427-KIT: Air Shaft Assy, 2018, 32, 29in 120mm, FLOAT LC NA 2, 1.110 Bore



APPLY GREASE AROUND PISTON, ON AIR SHAFT,
 BETWEEN BUMPER AND NEG PLATE, AND A THIN LAYER ON ENTIRE
 LENGTH OF PISTON BORE OF UPPER TUBE ID.

234-04-811
 Volume Spacer, FLOAT NA 2, 32

TORQUE:
 220±5 IN. LB.
 (INTO FORK CHASSIS)

GREASE:
 THIN LAYER
 OF SLICK HONEY

234-04-881
 Air Cap, FLOAT NA 2, 32 & 34, Blue Ano

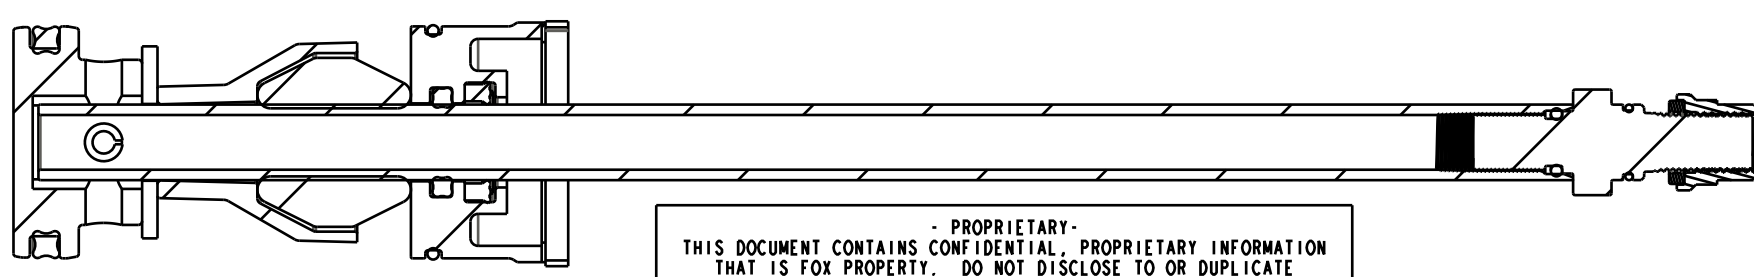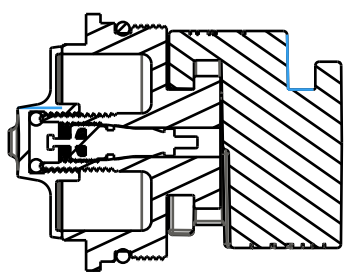

- PROPRIETARY -
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
 THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
 FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX Factory, Inc. Ph 831-768-1100
 130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
2018 32mm 29in 80-130 FLOAT NA2
1.110 Bore Air Spring Assemblies

SIZE DWG. NO.
C

PLOT SCALE | .00 : 1 | SHEET | OF |

4

3

2

ProE ASSEM