

APPLY BLUE MARINE GREASE TO THREADS ON ALUMINUM REBOUND NEEDLES

GREASE: THIN LAYER OF SLICK HONEY

LOCTITE: 2-3 DROPS RED 263 OR FEMALE THREADS

029-08-047 Seals: O-Ring [13.0MM ID x 1.0MM CS] Metric, N-70, Static

TORQUE: 40±5 IN. LB.

210-24-037 Damping Adj Part: Base Stud, M10.25, Grip

010-01-012 Ball [Ø.1094]

039-00-243 Spring: Detent [.138 TLG, .087 OD, 48 lb/in]

210-03-233 Damping Adj Part: Needle, Rbd, Injection Molded, 34 All

029-03-005 O-Ring (-005) [.070 C.S. X 0.101 ID]


820-03-476-KIT 2016 FIT4 Bearing Housing Assy

229-10-273 Shaft, 10mm Damper, Hard Ano, Grip, 34 All

SEE DETAIL A

Rebound Piston Assemblies:
820-03-330-KIT: 2017 Grip Rebound Piston Assy
820-03-458-KIT: 2017 Grip Rebound Piston Assy, Short Travel

TORQUE: 40±5 IN. LB.

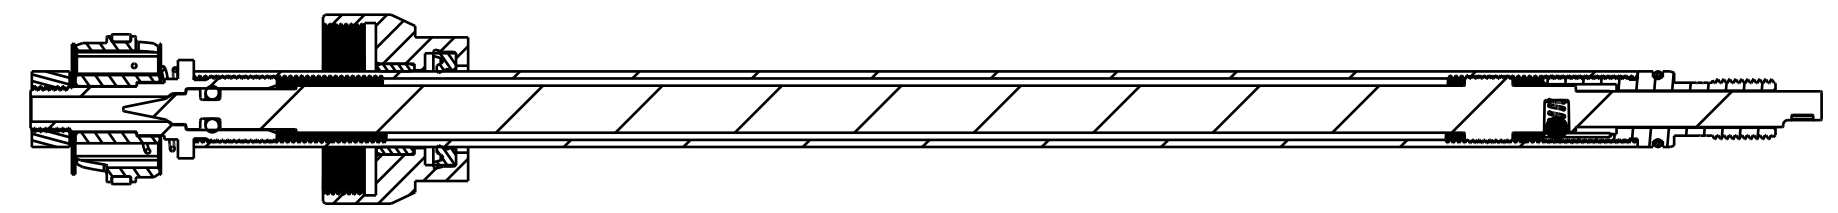

SECTION A-A

PROPRIETARY - THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX FOX Factory, Inc. Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE: 2017 34mm 27.5in/29in 80-120 & 130-160 GRIP Damper Shaft Assemblies

SIZE DWG. NO. C

PLOT SCALE: 1.00:1 SHEET 1 OF 1