


4

3

2

1

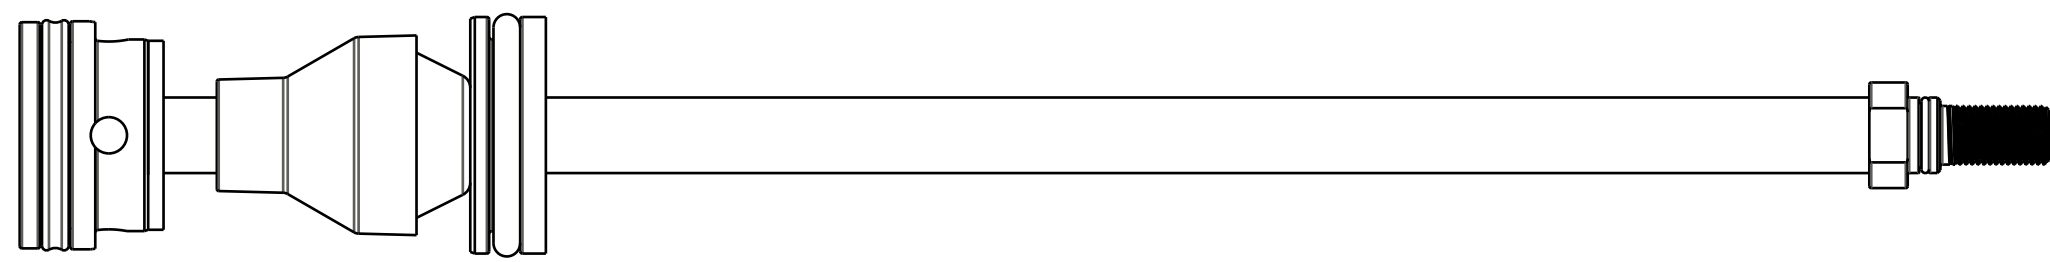

Seals: O-Ring [8.0MM ID x 1.0MM CS] Metric, N-70, Static

Base Stud: Float, 0.305-48 Thread

Seals: O-Ring [6.0mm ID x 1.5mm CS] Metric, N-70, Static

029-08-022

234-04-655

029-08-060

TORQUE:
50±5 IN.LB.

LOCTITE:
RED 263, 2-3 DROPS
OR ON FEMALE THREAD

NO LOCTITE ON O-RING GLANDS

GREASE:
THIN LAYER
OF SLICK HONEY

820-02-368-KIT
Neg Plate Subassembly, FLOAT 34, Rhythm

IMPORTANT:
GROOVE FACES
PISTON

234-04-629

Topout Bumper, FLOAT NA

234-04-739

Topout Spacer, Float, Rhythm

GREASE:
THIN LAYER
OF SLICK HONEY

Shafts:

229-10-284: Shaft, Float Air Spring, Hard Ano, 27.5 Rhythm 120mm Travel
 229-10-283: Shaft, Float Air Spring, Hard Ano, 27.5 Rhythm 130mm Travel
 229-10-282: Shaft, Float Air Spring, Hard Ano, 27.5 Rhythm 140mm Travel
 229-10-281: Shaft, Float Air Spring, Hard Ano, 27.5 Rhythm 150mm Travel

018-05-057

Fastener, Standard: Flat Washer [10mm ID X 26 OD]

IMPORTANT:
PRESS PIN
UNTIL CENTERED

060-01-010

Pin: Spring [Ø 0.188 X 0.875 TLG] Spring Steel, Zinc

222-01-303

Piston, FLOAT Air Spring, 34 Rhythm

035-00-213

Seals: Q-Ring [(-213) .139 C.S. X 0.921 ID]

IMPORTANT:
VERIFY SEAL IS NOT
TWISTED AFTER INSTALL

FOX Factory, Inc. 130 Hangar Way, Watsonville, CA 95076 USA Ph 831-768-1100 Fax 831-768-9312	
TITLE 2018 34mm Rhythm 27.5in 120-150 FLOAT NA2 Air Shaft Assemblies	
SIZE C	DWG. NO.
PLOT SCALE .00 : 1	SHEET OF 1

PROPRIETARY - THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

1

ProE ASSEM