


4

3

2

1

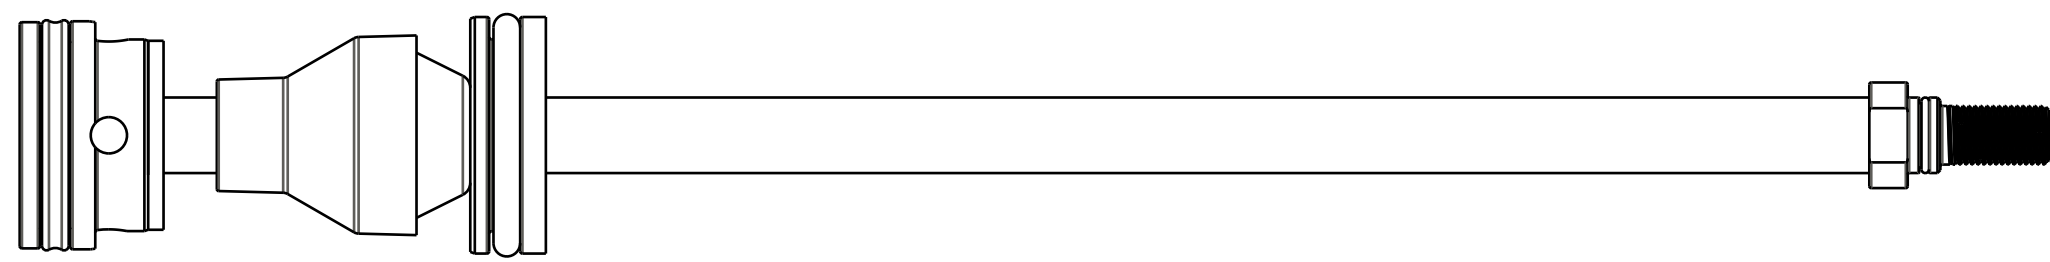

Seals: O-Ring [8.0MM ID x 1.0MM CS] Metric, N-70, Static

234-04-655
Base Stud: Float, 0.305-48 Thread

029-08-060
Seals: O-Ring [6.0mm ID x 1.5mm CS] Metric, N-70, Static

029-08-022

TORQUE:
50±5 IN.LB.

LOCTITE:
RED 263, 2-3 DROPS
OR ON FEMALE THREAD

NO LOCTITE ON O-RING GLANDS

GREASE:
THIN LAYER
OF SLICK HONEY

820-02-368-KIT
Neg Plate Subassembly, FLOAT 34, Rhythm

IMPORTANT:
GROOVE FACES
PISTON

234-04-629
Topout Bumper, FLOAT NA

234-04-739
Topout Spacer, Float, Rhythm

GREASE:
THIN LAYER
OF SLICK HONEY

Shafts:
229-10-288: Shaft, Float Air Spring, Hard Ano, 29 Rhythm 100mm Travel
229-10-287: Shaft, Float Air Spring, Hard Ano, 29 Rhythm 110mm Travel
229-10-286: Shaft, Float Air Spring, Hard Ano, 29 Rhythm 120mm Travel
229-10-285: Shaft, Float Air Spring, Hard Ano, 29 Rhythm 130mm Travel

018-05-057
Fastener, Standard: Flat Washer [10mm ID X 26 OD]

IMPORTANT:
PRESS PIN
UNTIL CENTERED

060-01-010
Pin: Spring [Ø 0.188 X 0.875 TLG] Spring Steel, Zinc

222-01-303
Piston, FLOAT Air Spring, 34 Rhythm

035-00-213
Seals: Q-Ring [(-213) .139 C.S. X 0.921 ID]

IMPORTANT:
VERIFY SEAL IS NOT
TWISTED AFTER INSTALL

PROPRIETARY
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

		FOX Factory, Inc.	Ph 831-768-1100
		130 Hangar Way, Watsonville, CA 95076 USA	Fax 831-768-9312
TITLE			
2018 34mm Rhythm 29in 100-130			
FLOAT NA2 Air Shaft Assemblies			
SIZE DWG. NO.			
C			
PLOT SCALE .00 : 1		SHEET OF 1	

4

3

2

1

ProE ASSEM