

REFERENCE ONLY
(FOR INSTALLATION
INTO FORK)

TORQUE:
80±5
IN-LBS

210-03-120
Knob, Rebound, 2011 36_40

TORQUE:
5.0±1.0 IN. LB.

LOCTITE:
BLUE 242
ONE DROP

018-01-004-A
Fastener, Standard: Screw [#8-32 X 0.250 TLG]

241-00-011
Fastener, Custom: Nut, Bottom, R

241-01-011
Fastener, Custom: Crush Washer, Plastic, 13mm

820-05-335-KIT
2016 FIT4 Bottom Stud Interface Parts 34

CARTRIDGE ASSY


820-05-473-KIT
2018 FIT4 TopCap Interface Parts P-S Remote, U-Cup, Push-Unlock

TORQUE:
11±3 IN-LBS


REFERENCE ONLY
(FOR INSTALLATION
INTO FORK)

TORQUE:
220±5 IN. LB.

SEE DETAIL A

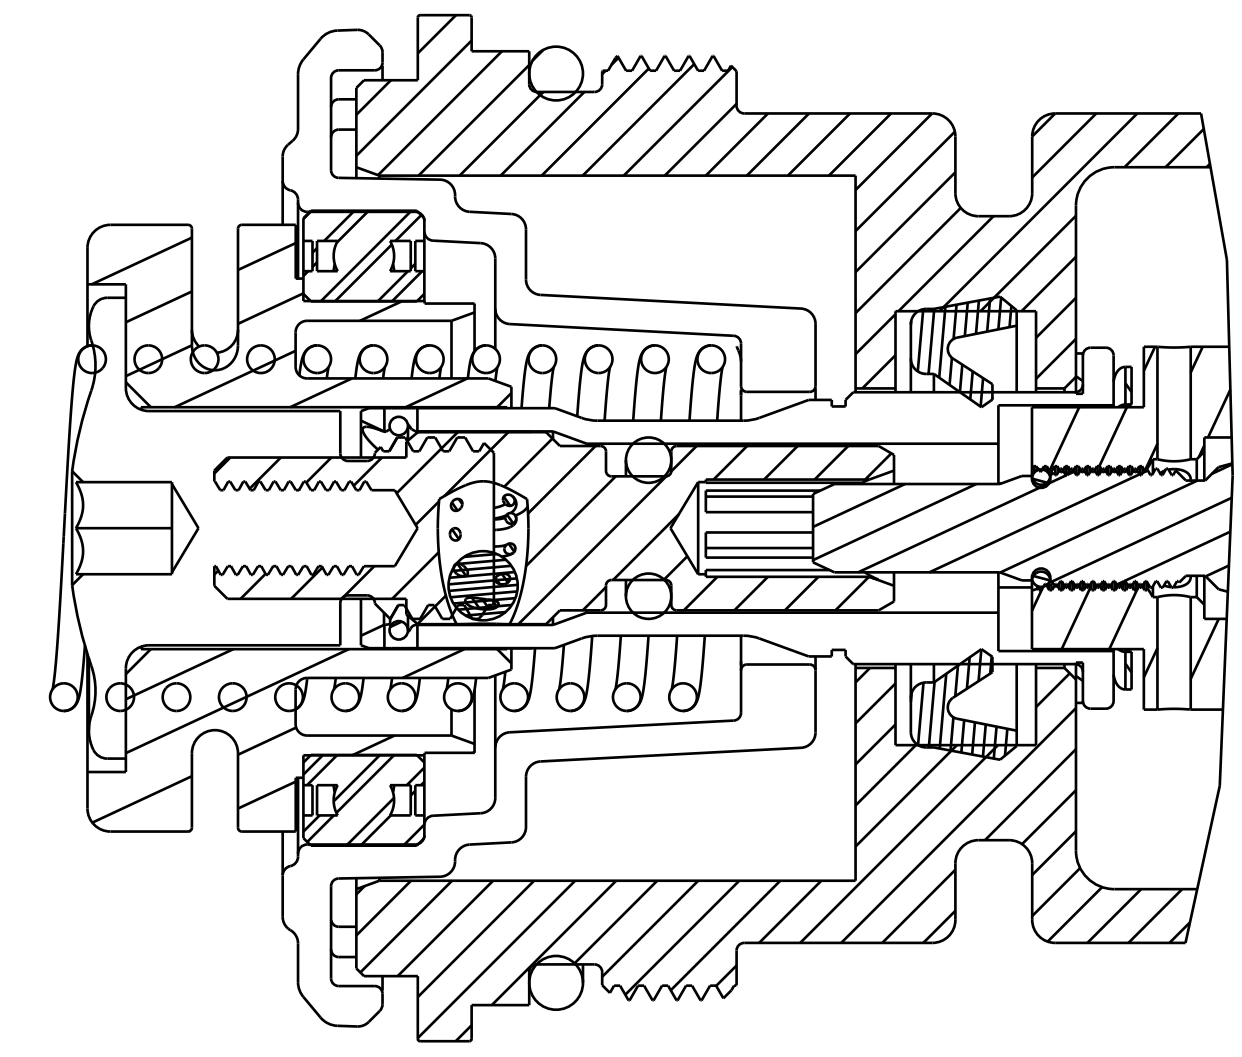

DETAIL A
SCALE 4.000

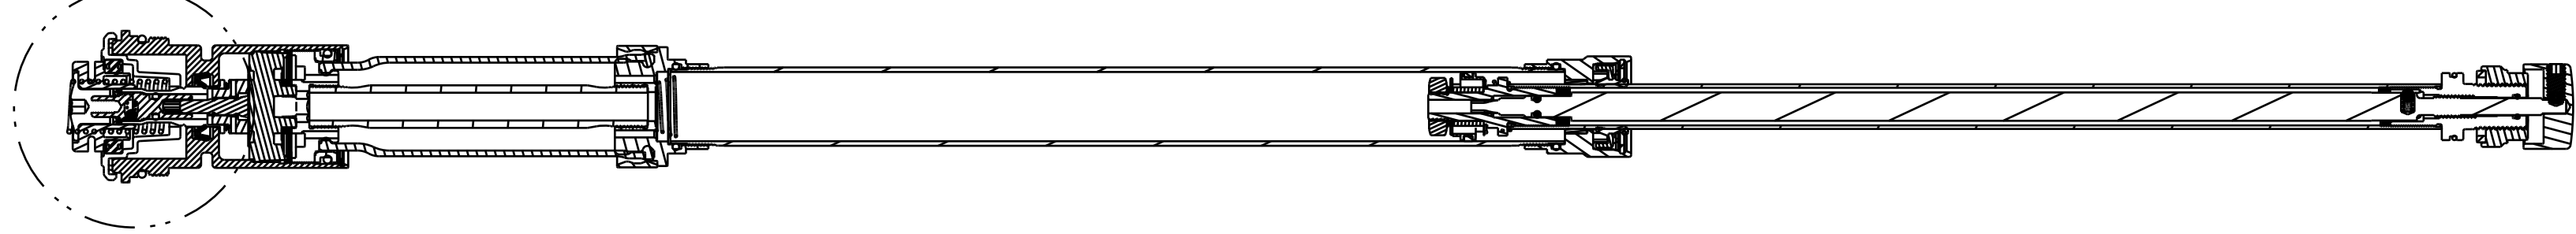

FOX Factory, Inc.
130 Hangar Way, Watsonville, CA 95076 USA
Ph 831-768-1100
Fax 831-768-9312
TITLE
**2019 34 P-S FIT4 Remote
Cartridge Assemblies Complete**

SIZE DWG. NO.
D
PLOT SCALE 1.00:1 | SHEET 1 OF 1

PROPRIETARY
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOR PROPERTY USE ONLY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.