

4

3

2

1

D

D

C

C

B

B

A

A

002-02-077
Bearing: External, Turcon [.136W x .869OD x .031THK]

029-08-040
Seals: O-Ring [17.0MM ID x 1.0MM CS] Metric, N-70, Static

Piston: Damping, .868in Bore, .250in Post, X2

044-04-070
Valve: [.700 OD X .252 ID X .0045 TH]

(044-04-070)

043-15-071
Valve: Ring Shim [0.700 OD X 0.610 ID X 0.015 TH]

044-04-060
Valve: [.600 OD X .252 ID X .0045 TH]



(044-20-035)

(044-04-060)

044-04-050
Valve: [.500 OD X .252 ID X .0045 TH]

044-20-035
Valve: [.350 OD X .252 ID X .020 TH]

233-00-286
Spacer: Topout Plate [.250 ID X .783 OD X .070 THK] Steel

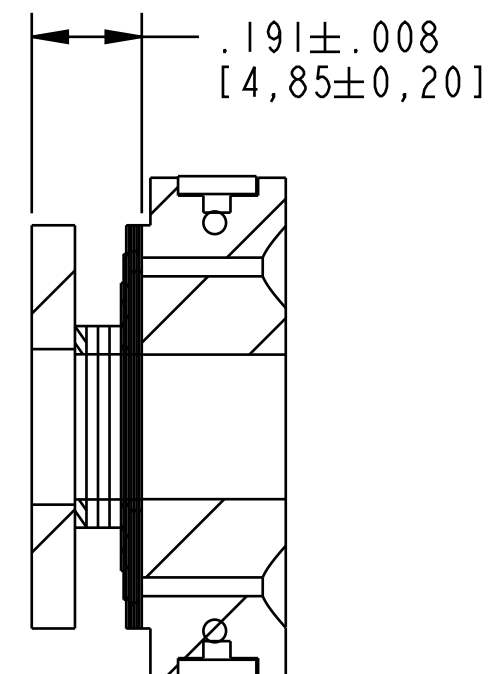

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX **FOX Factory, Inc.** Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
Piston Assembly:
2018, X2, .868in BORE, CF

SIZE DWG. NO. **805-00-105-KIT**
C PLOT SCALE | .60:1 | SHEET 1 OF 1