

Bodycap: Piggyback, Trunnion, Bomber CR/Van RC, [1.070 Bore, Ø .500 Shaft]

(010-01-002)

TORQUE:
7±2 IN.LB.

(039-00-042)

019-01-049
Screw [M3 X 6mm] Socket Flat Head, SS w/ Patchlock

210-03-292
Knob: Bomber CR, Comp. Adj. Gold Ano

010-01-002
Ball [Ø 0.0938] Steel

039-00-042
Spring: Detent [.13 TLG X .088 X 22 lb/in]

018-01-026
Screw [#6-32 X .250 TLG]

TORQUE:
14±2 IN.LB.

029-03-006
O-Ring (-006) [1.070 C.S. X .114 ID]

GREASE:
THIN LAYER
HI TEMP GREASE (BLUE)


029-03-023
Seals: O-Ring [(-023) .070 C.S. X 1.051 ID] Standard, N-70, Static

GREASE:
THIN LAYER OF SLICK HONEY

029-03-025
O-Ring (-025) [1.070 C.S. X 1.176 ID]

029-00-008
O-Ring (-008) [1.070 C.S. X .176 ID]

210-15-067
Damping Adj. Part: Low Speed, Van RC [7/64 Hex]

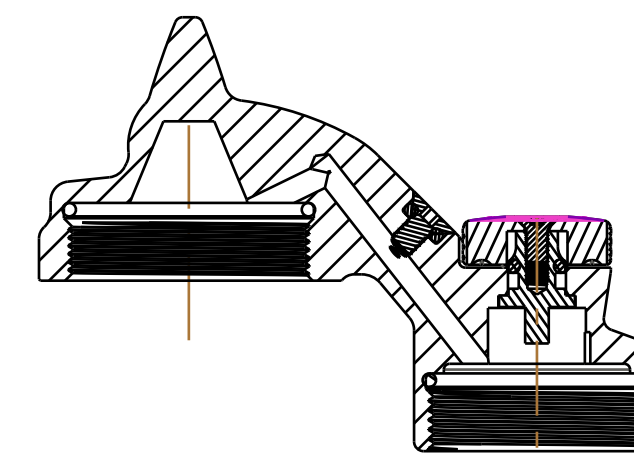

SECTION A-A

FOX FOX Factory, Inc. Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE Body Cap Assy: Piggyback, 2020
Bomber CR, Trunnion
[1.070 Bore, Ø .500 Shaft]

SIZE DWG. NO. 804-12-011-KIT

PLOT SCALE 1:1 SHEET 1 OF 1

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.