

4

3

2

1

**TOPCAP ASSEMBLIES:**  
 820-05-431-KIT: Topcap Assy, FLOAT LC NA 2, 32, Black Ano, Hollow Volume Spacer, 33cc  
 820-05-430-KIT: Topcap Assy, FLOAT LC NA 2, 32, Black Ano, Hollow Volume Spacer, 22cc

241-00-005  
 Fastener, Custom: Nut, Bottom, R\_RL\_RLC

241-01-002  
 Fastener, Custom: Crush Washer, Plastic, R\_RL\_RLC

038-00-091  
 Retaining Ring: Internal, Smalley EH-29-S02, 302 SS

**IMPORTANT:**  
 INSPECT 100% THAT RETAINING RING IS FULLY INSTALLED INTO GROOVE FULL 360°

TORQUE:  
 50±5 IN.LB.  
 (INTO FORK CHASSIS)

**AIR SHAFT ASSEMBLIES:**  
 820-02-425-KIT: Air Shaft Assy, 2018, 32, 29in 100mm, FLOAT LC NA 2, 1.110 Bore  
 820-02-427-KIT: Air Shaft Assy, 2018, 32, 29in 120mm, FLOAT LC NA 2, 1.110 Bore



O-Ring (-008) [.070 C.S. X .176 ID]

GREASE:  
 THIN LAYER  
 OF SLICK HONEY

234-04-811  
 Volume Spacer, FLOAT NA 2, 32

TORQUE:  
 220±5 IN.LB.  
 (INTO FORK CHASSIS)

Air Cap, FLOAT NA 2, 32 & 34, Blue Ano

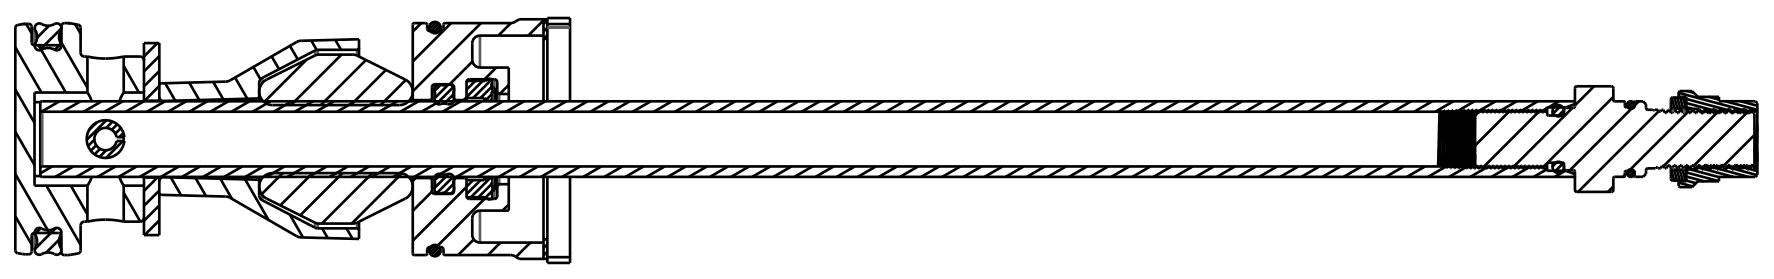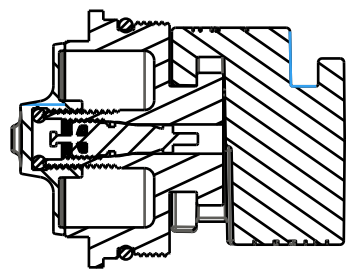

SECTION A-A

- PROPRIETARY -  
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
 THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
 FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

	<b>FOX Factory, Inc.</b>	Ph 831-768-1100
	130 Hangar Way, Watsonville, CA 95076 USA	Fax 831-768-9312
TITLE	<b>2022 32 FLOAT NA2 AIR SPRING ASSEMBLIES</b>	
SIZE	DWG. NO.	
<b>C</b>		
PLOT SCALE   .00 : 1	SHEET   OF	

4

3

2

1