

Fastener, Custom: Air Shaft, 2014 32 26in, 27.5in, & 29in 80-150mm Evolution Series

Seals:O-Ring [(-009) .070 C.S. X .208 ID] Standard N-70 Static

Washer [M5, 5.3mm ID X 10mm OD X 1mm Thk], Zinc Plated


RETAINING RING: INTERNAL, SMALLEY EH-29-S02, 302SS

Spacer: 10mm Travel Adjust, 2014 32 mm 26in, 27.5in, and 29in

TORQUE: 50±5 IN LB

OIL: 30cc GREEN 10WT OIL IN TO LOWER LEG

IMPORTANT: VERIFY THAT RETAINING RING IS FULLY ENGAGED IN UPPERTUBE SNAP-RING GROOVE

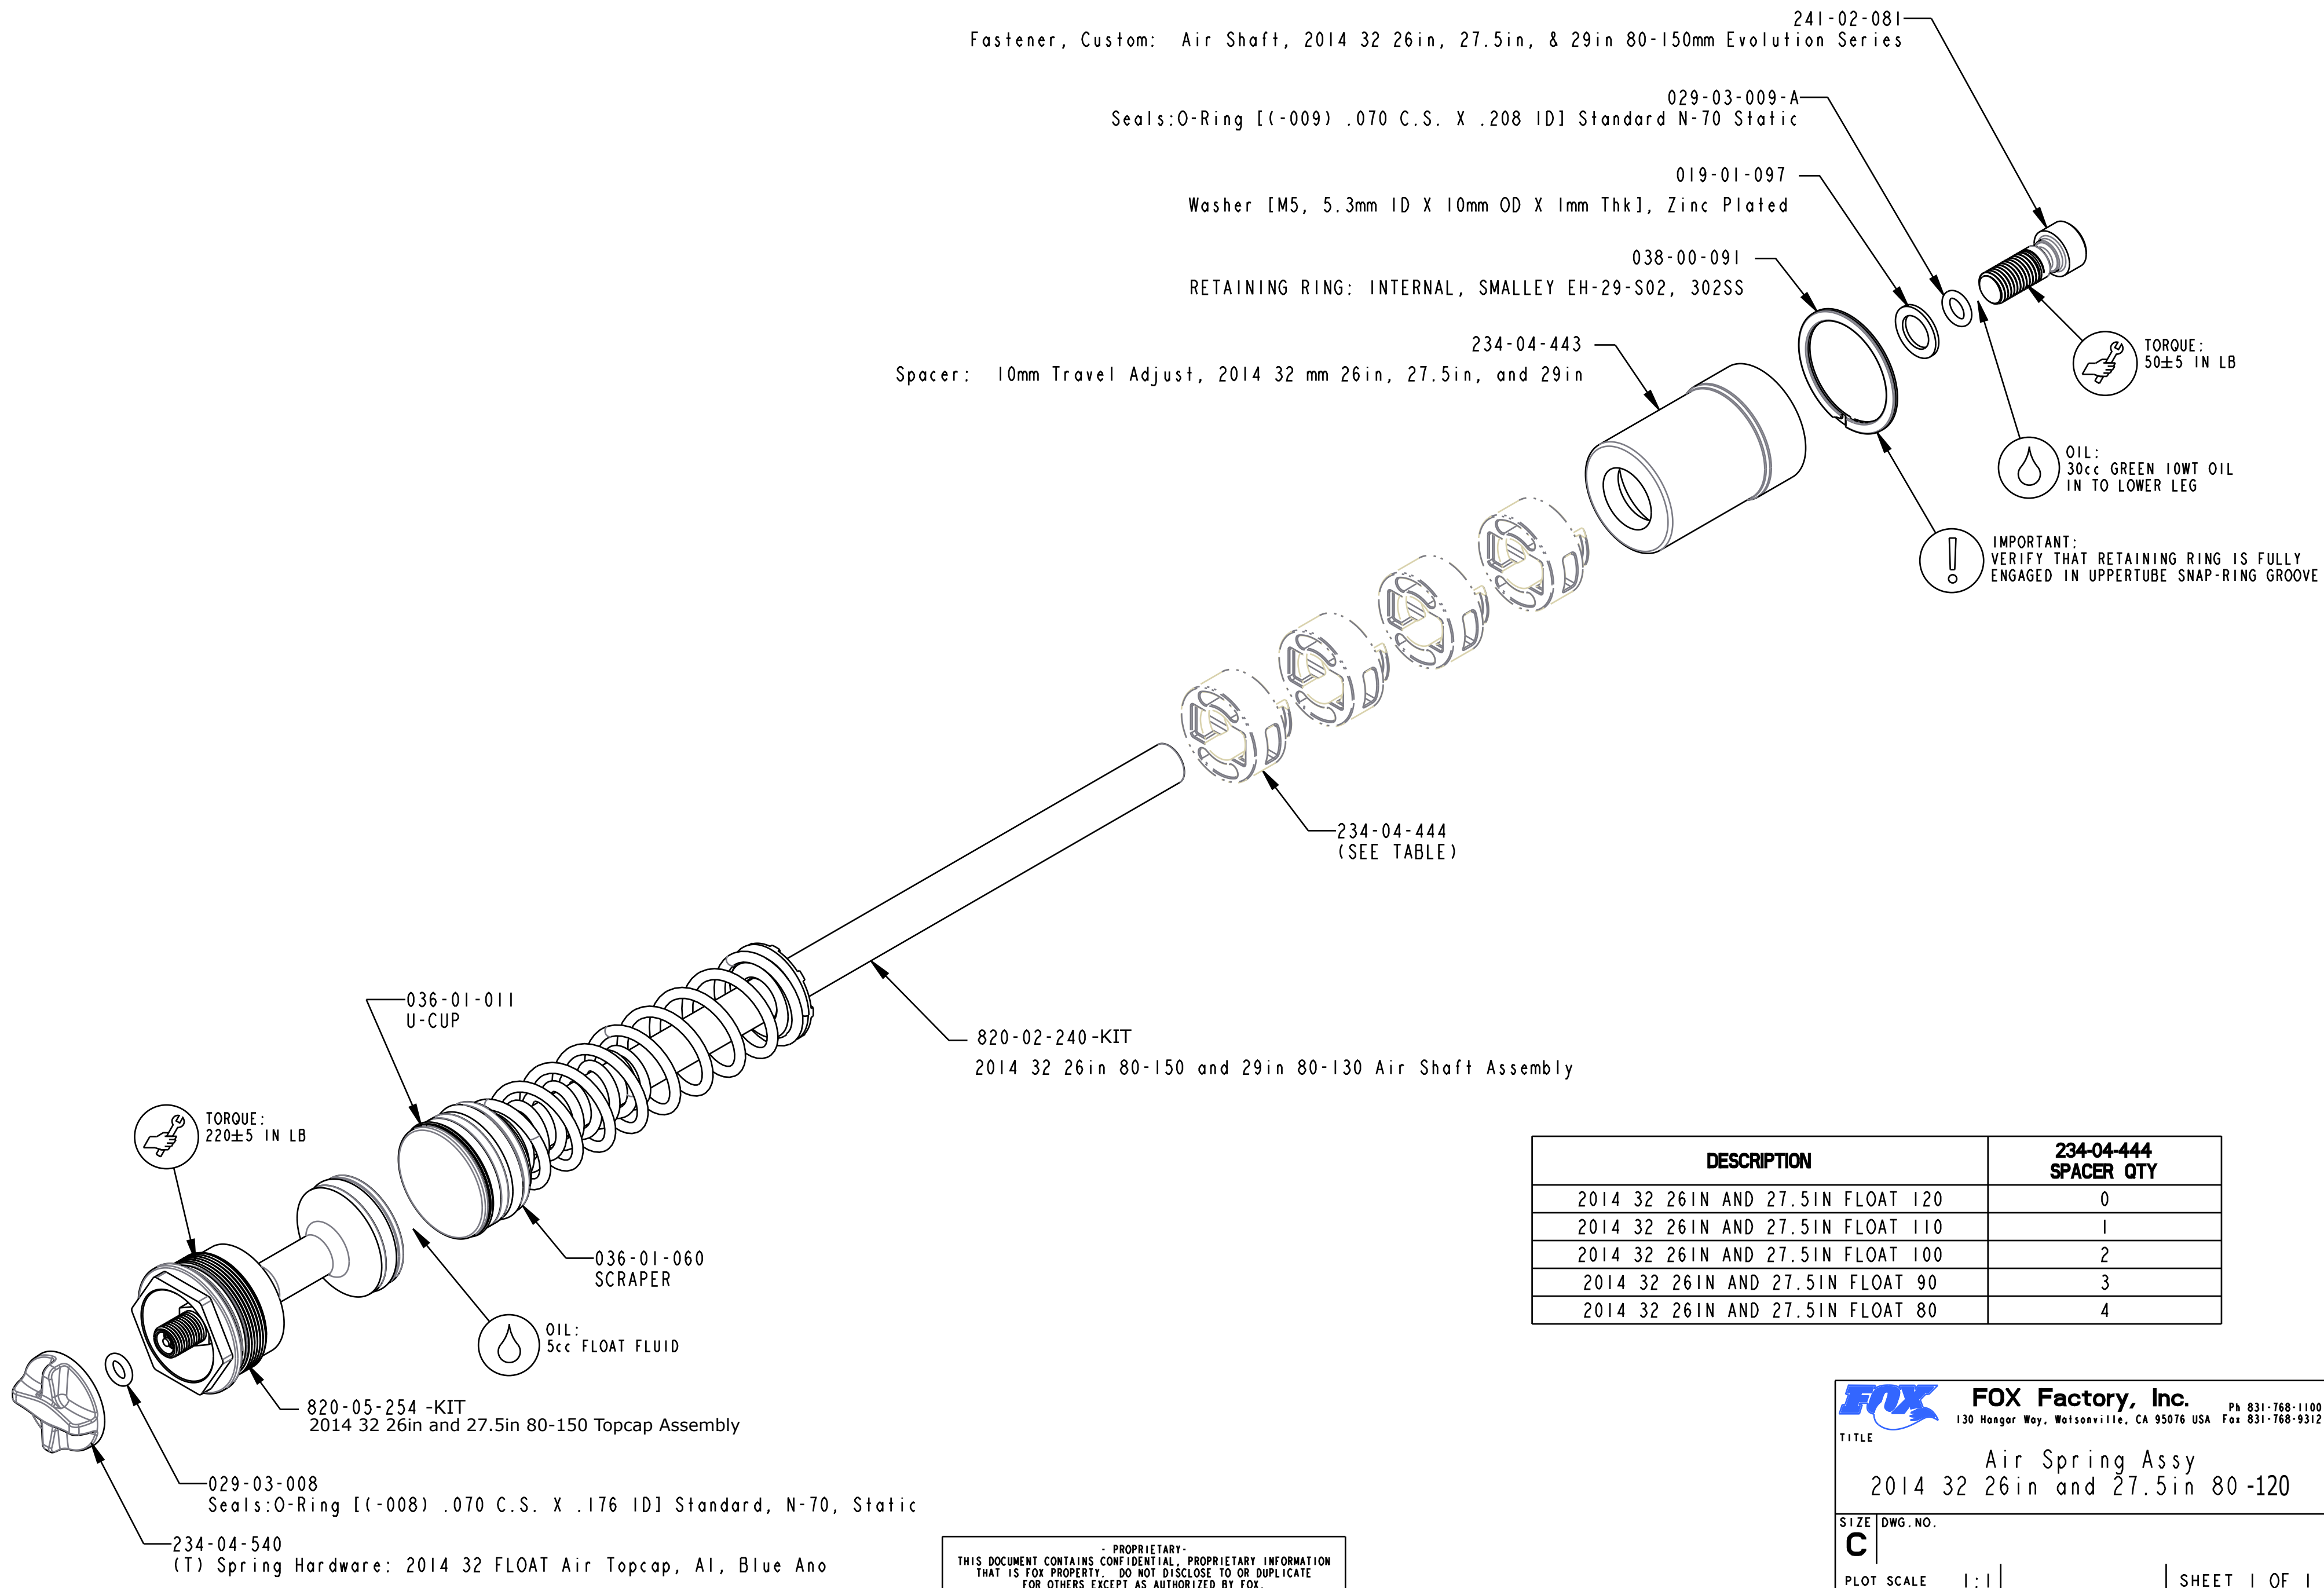

DESCRIPTION	234-04-444 SPACER QTY
2014 32 26IN AND 27.5IN FLOAT 120	0
2014 32 26IN AND 27.5IN FLOAT 110	1
2014 32 26IN AND 27.5IN FLOAT 100	2
2014 32 26IN AND 27.5IN FLOAT 90	3
2014 32 26IN AND 27.5IN FLOAT 80	4

FOX FOX Factory, Inc. Ph 831-768-1100
 130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
 Air Spring Assy
 2014 32 26in and 27.5in 80-120

SIZE DWG. NO.
C
 PLOT SCALE 1:1 SHEET 1 OF 1

PROPRIETARY - THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.