

4

3

2

1

038-00-065  
Retaining Ring: Snap, Smalley, Internal, Custom, 0.923 BORE

241-01-029  
Bladder retainer, 011 RC2

210-22-420  
Lower Bladder Ring, Snap Ring, 011 RC2

GREASE:  
THIN LAYER  
ON INNER AND OUTER SEAL BEADS

GREASE:  
THIN LAYER OF SLICK HONEY  
ON INNER SURFACE

TORQUE:  
75±5 IN.LB.

GREASE:  
THIN LAYER OF SLICK HONEY  
ON INNER SURFACE

GREASE:  
THIN LAYER OF  
SLICK HONEY

TORQUE:  
75±5 IN.LB.

820-03-395-KIT  
Base Valve Assy

210-22-418  
Upper Bladder Ring, 011 RC2

029-08-053  
Topcap O-Ring

Topcap

820-03-187-KIT  
2011 RC2 Adjuster Assy

IMPORTANT:  
VERIFY THAT RETAINING RING  
IS COMPLETELY SEATED

038-00-059  
Retaining Ring, Internal, VHM-14

038-00-065

241-01-029

210-22-420

GREASE

GREASE

TORQUE

GREASE

GREASE

TORQUE

210-22-418

029-08-053

820-03-187-KIT

IMPORTANT

038-00-059

038-00-065

241-01-029

210-22-420

GREASE

GREASE

TORQUE

GREASE

GREASE

TORQUE

210-22-418

029-08-053

820-03-187-KIT

IMPORTANT

038-00-059

IMPORTANT:  
ENSURE RETAINING RING IS FULLY  
SEATED INTO GROOVE FULL 360°


820-03-371-KIT  
REBOUND ASSY

TORQUE:  
75±5 IN.LB.

210-22-391  
Bladder, 2011 36\_40

207-80-000  
CARTRIDGE BODY

Fully Extended Total Length  
31.1in +/- 0.2in

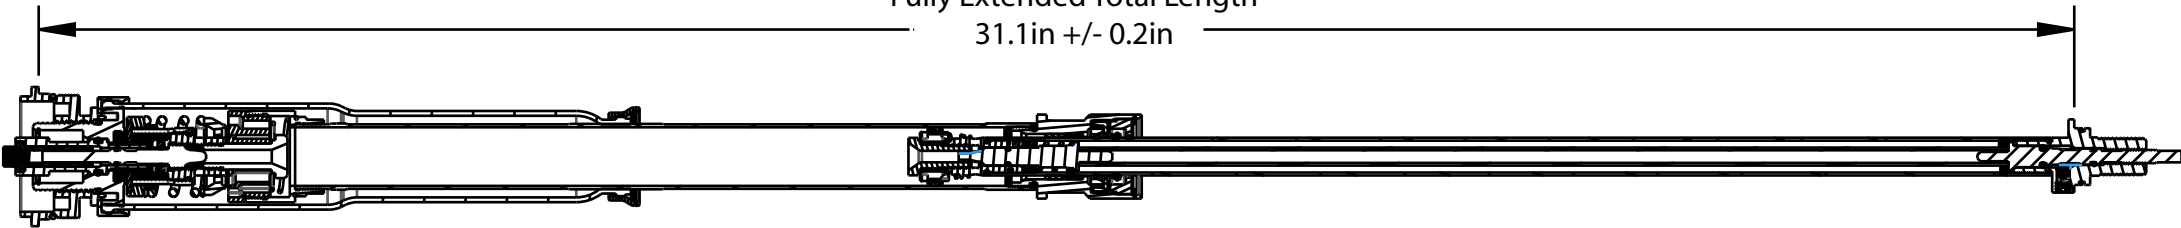

SECTION A-A

PROPRIETARY  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

	<b>FOX Factory, Inc.</b>		Ph 831-768-1100
	130 Hangar Way, Watsonville, CA 95076 USA		Fax 831-768-9312
TITLE	2016 40 RC2 Cartridge		
SIZE	DWG. NO.	C	
PLOT SCALE	0.50:1	SHEET 1 OF 1	