


4

3

2

1

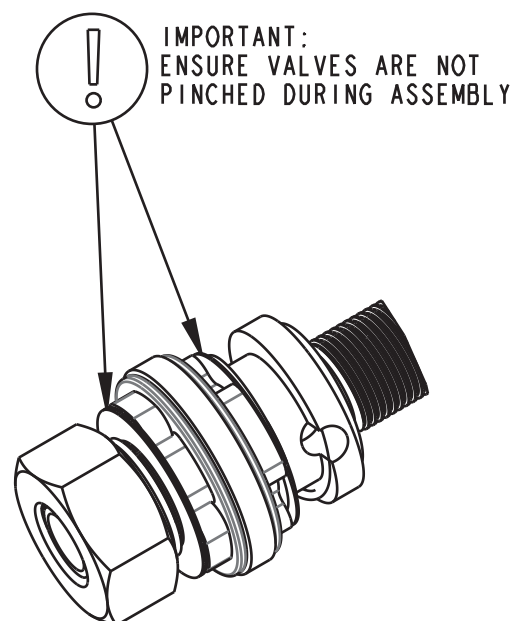

DETAIL A  
SCALE 2:1

Air Valve Parts: Ball [Ø 0.1094] E52100 Grade 25 Steel, Chrome

Spring: [0.125 TLG X 0.125 OD X 50.00 lbs/in] Music Wire, Zinc plated

GREASE:  
THIN LAYER  
OF SLICK HONEY

029-08-047  
Seals: O-Ring [13.0MM ID x 1.0MM CS] Metric, N-70, Static

039-00-029-A

IMPORTANT:  
NO GREASE IN  
DETENT GROOVES

GREASE:  
THIN LAYER OF BLUE MARINE  
GREASE ON FULL 360° OF THREAD

029-08-192  
Seals: O-Ring [3.5mm ID x 1.5mm  
CS] Metric, N-70, Static

TORQUE:  
30±5 IN LBS

LOCTITE:  
RED 263, 1 DROP  
APPLY PER 605-14-175-01

210-24-476  
Damping Adj Part: Base Stud, 2020 FIT4, 8mm, 34, 36, 7075-T6



210-24-491  
Rebound Adjust Needle, 2020 FIT4, 8mm, 34mm Chassis

029-08-026  
Seals: O-Ring [2.0mm ID X  
1.5mm CS] Metric, N-60, Static

GREASE:  
THIN LAYER  
OF SLICK HONEY


229-10-634  
Shaft, Damper, 8mm, 2020 FIT4, 34mm Non-SC

SEE DETAIL A

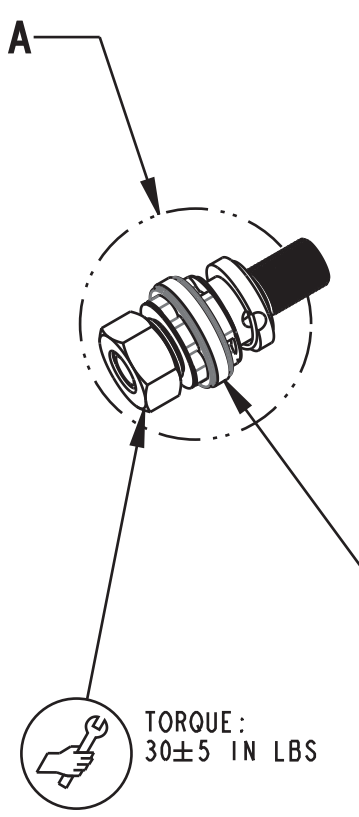

820-03-569-KIT  
Sealhead Assy, 2019 FIT [8mm, M17.56]  
Trelleborg, O-ring

820-03-610-KIT  
2020 FIT4 Rebound Piston Assy, 8mm Shaft

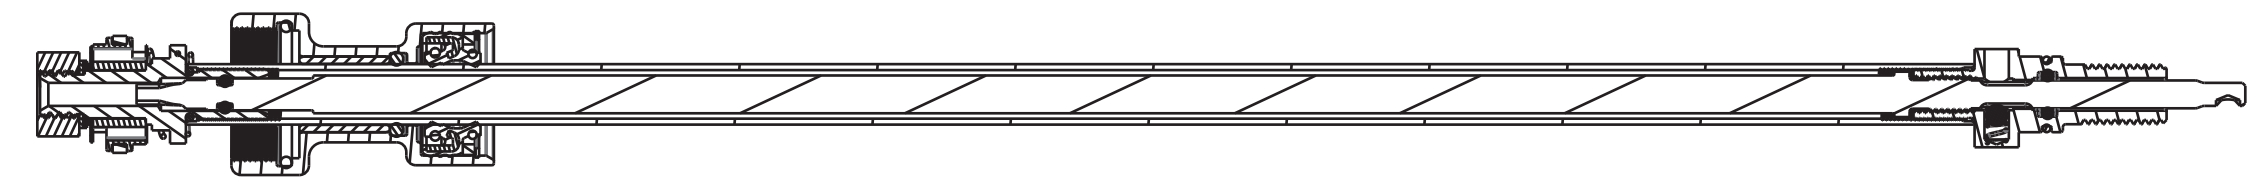

SECTION A-A

PROPRIETARY  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

		<b>FOX Factory, Inc.</b>	Ph 831-768-1100
		130 Hangar Way, Watsonville, CA 95076 USA	Fax 831-768-9312
TITLE	2020 34 ALL Non-SC FIT4 8mm Damper Shaft Assy		
SIZE	DWG. NO.	820-03-604-KIT	
PLOT SCALE	1:1	SHEET 1 OF 1	

4

3

2

ProE ASSEM