


4

3

2

1

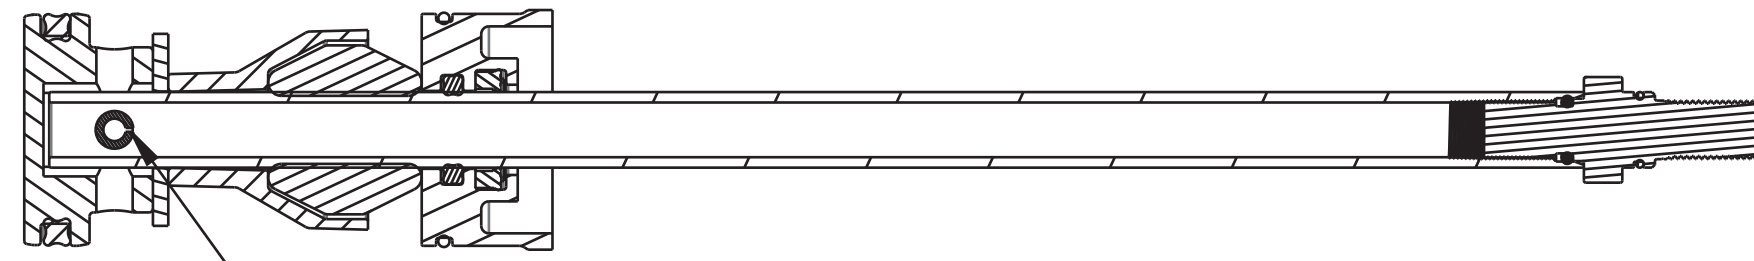

IMPORTANT:
ORIENT GAP IN PIN TOWARDS
TOPOUT SPACER $\pm 15^\circ$

Seals: O-Ring [8.0MM ID x 1.0MM CS] Metric, N-70, Static

Base Stud: Float, 0.305-48 Thread

Seals: O-Ring [6.0mm ID x 1.5mm CS] Metric, N-70, Static

Topout Bumper, FLOAT NA

Topout Spacer, FLOAT NA 2, 0.080" Thick, Aluminum

TORQUE:
50 \pm 5 IN LB

GREASE:
THIN LAYER
OF SLICK HONEY

Seals: Q-Ring [(-212) 0.139 C.S. X 0.859 ID]

PISTON

LOCTITE:
1-2 DROPS
RED 263

AIR SHAFT

IMPORTANT:
PRESS PIN UNTIL CENTERED

820-02-409-KIT:
Neg Plate Subassembly, 2018 FLOAT LC NA 2,
32, Short Travel, 1.110 Bore

Pin: Spring [Ø 0.188 X 0.875 TLG] Spring Steel, Zinc

IMPORTANT:
VERIFY SEAL IS NOT
TWISTED AFTER INSTALL

FOX **FOX Factory, Inc.** Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
**2022 32 FLOAT NA2
AIR SHAFT ASSEMBLIES**

SIZE DWG. NO.
C
PLOT SCALE 1:1:1 SHEET 1 OF 1

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

1

ProE ASSEM