


- ASSEMBLY INSTRUCTIONS:
1. ASSEMBLE DAMPER SHAFT ASSEMBLY TO PRESSURE TUBE
 2. FILL CARTRIDGE 1/2 FULL WITH OIL
 3. STROKE DAMPER SHAFT 5X, THEN TOP OUT DAMPER SHAFT
 4. FILL OIL HEIGHT TO PRESSURE TUBE BLEED HOLE
 5. TOPCAP ASSY
 - A. SLOWLY PUSH INTO PRESSURE TUBE AND ENGAGE TOPCAP THREADS
 - B. ROTATE TO ENGAGE 1-2 THREADS
 6. TORQUE TOPCAP AND SEALHEAD ASSEMBLIES
 7. STROKE DAMPER SHAFT APPROXIMATELY 75% OF MAX DAMPER TRAVEL TO EXPELL EXCESS OIL

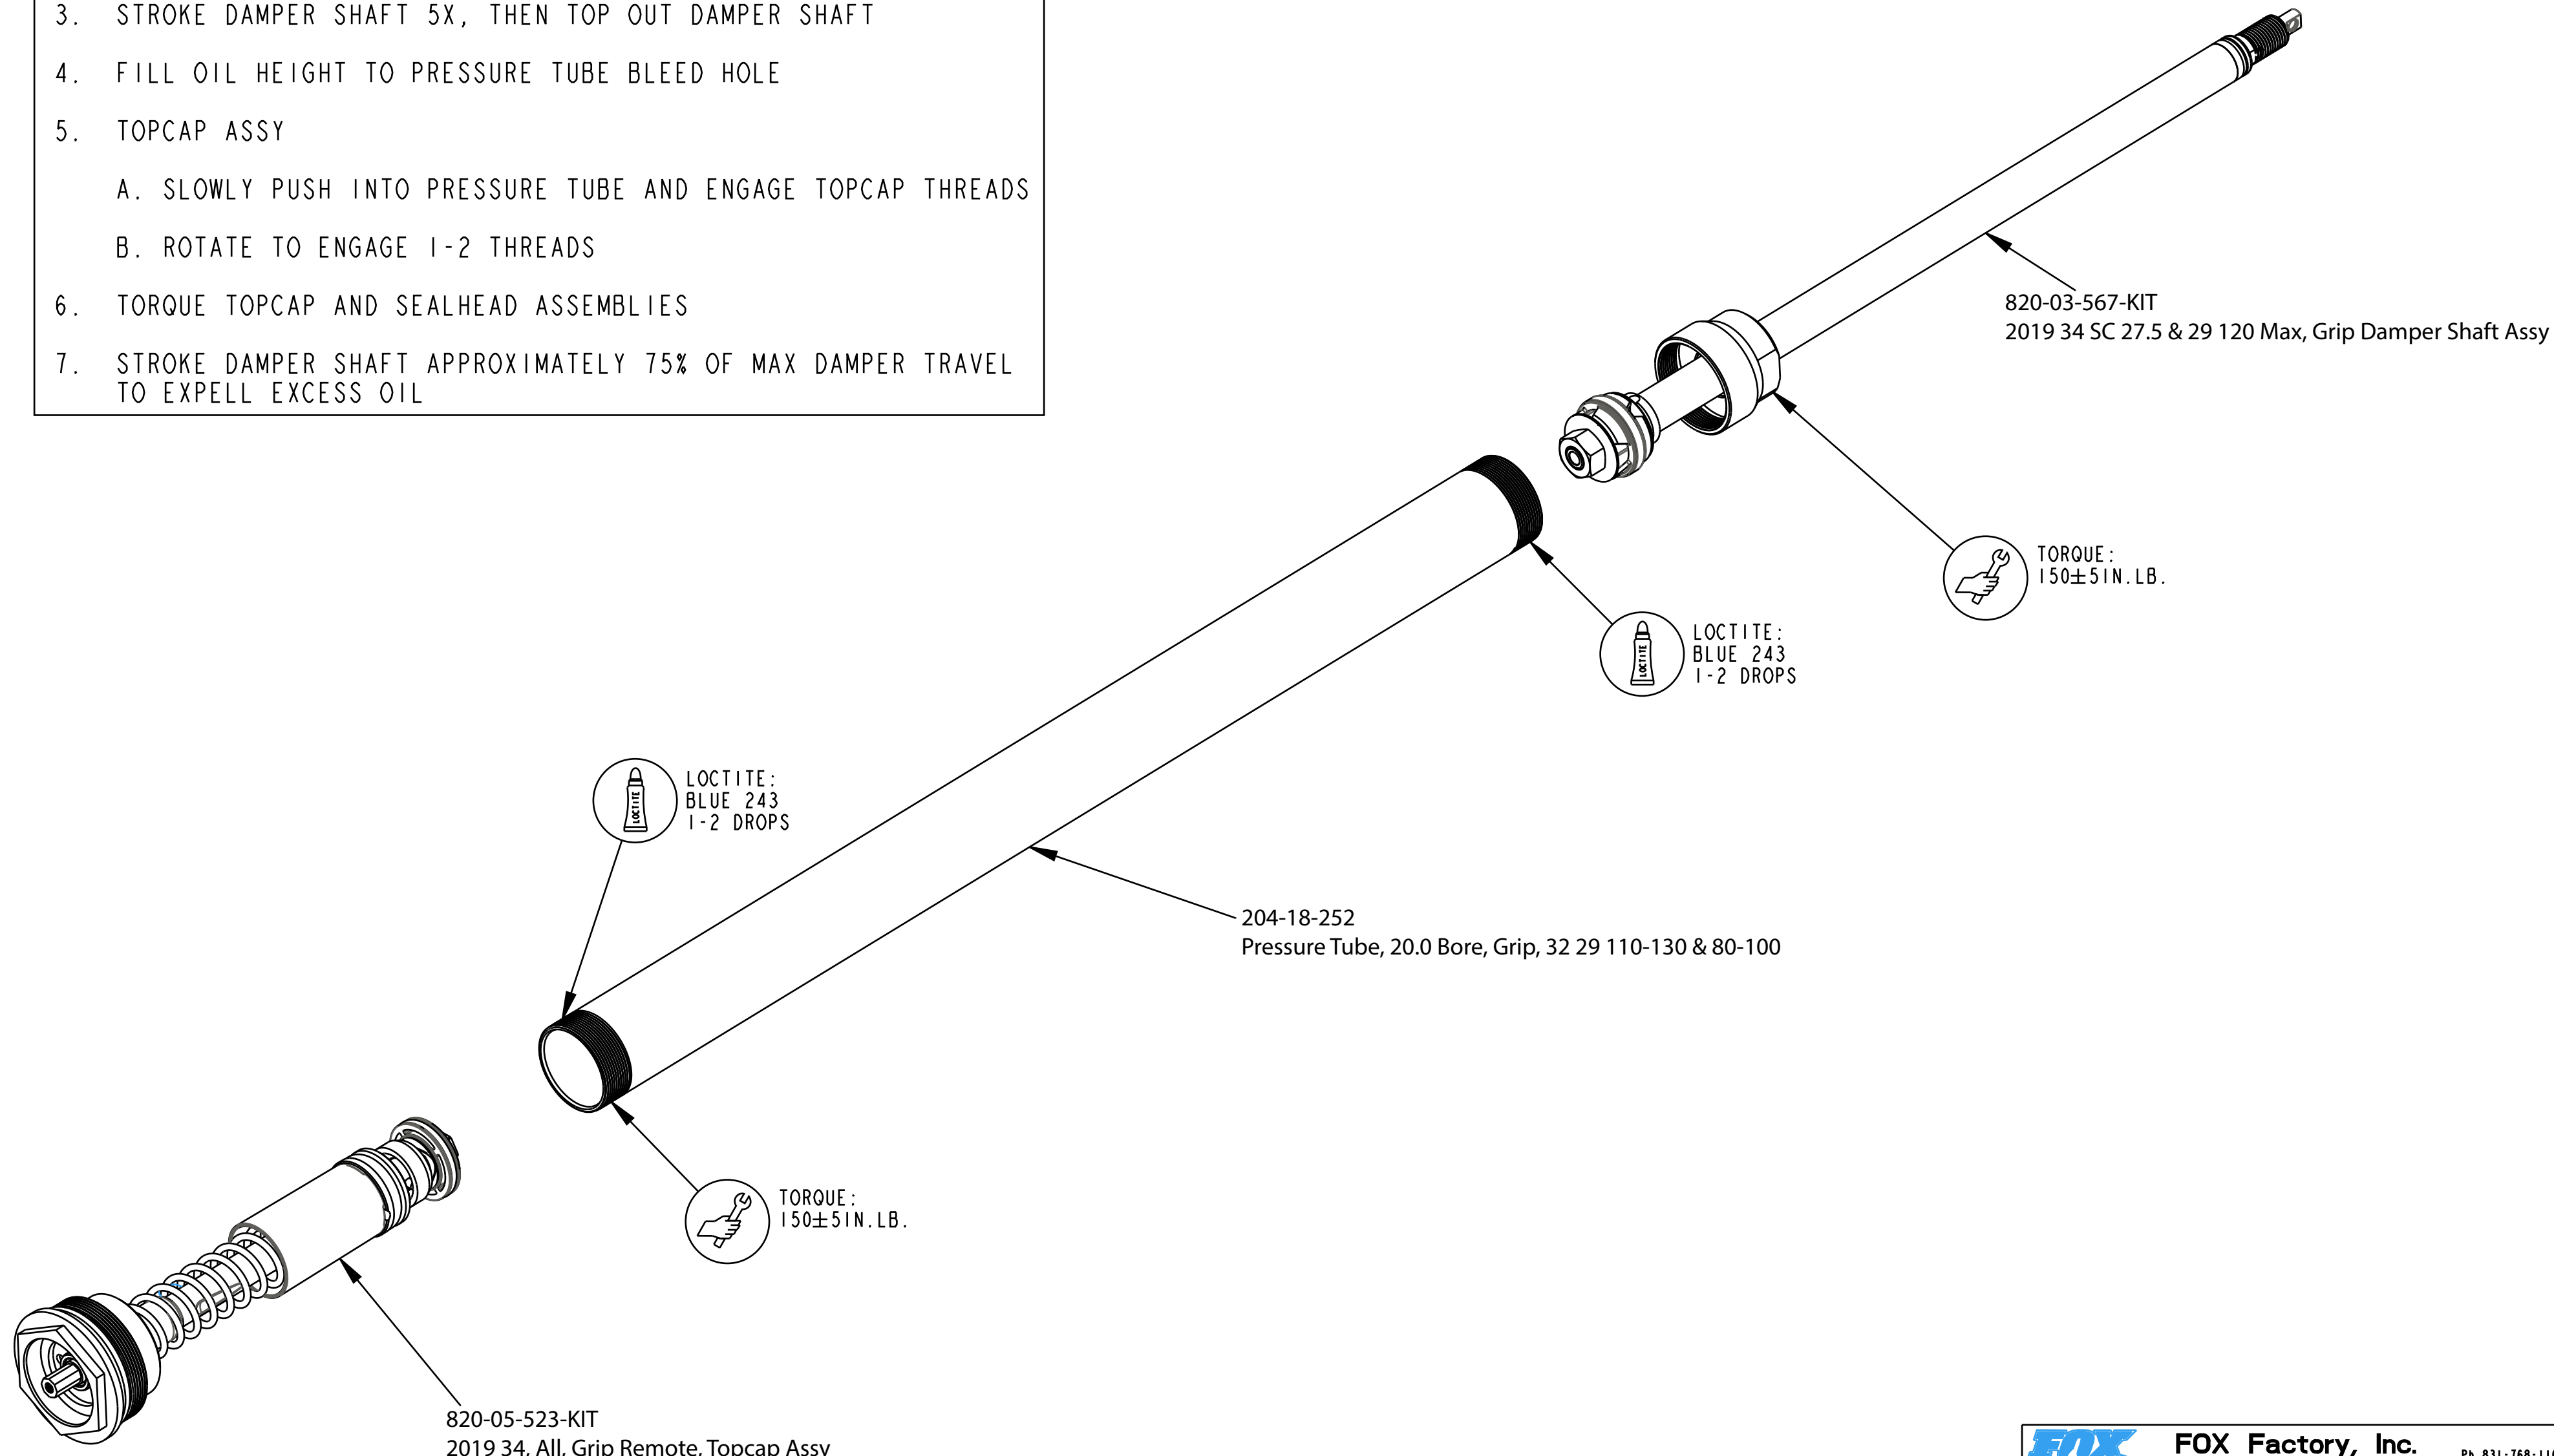

| | | | |
|----------------------------------|--|---|------------------|
| | | FOX Factory, Inc. | Ph 831-768-1100 |
| | | 130 Hangar Way, Watsonville, CA 95076 USA | Fax 831-768-9312 |
| 2019 34 SC Grip | | | |
| Remote Cartridge Assembly | | | |
| TITLE | | SIZE DWG. NO. | |
| C | | C | |
| PLOT SCALE 0.75:1 | | SHEET 1 OF 1 | |

- PROPRIETARY -
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
 THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
 FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.