


4

3

2

1

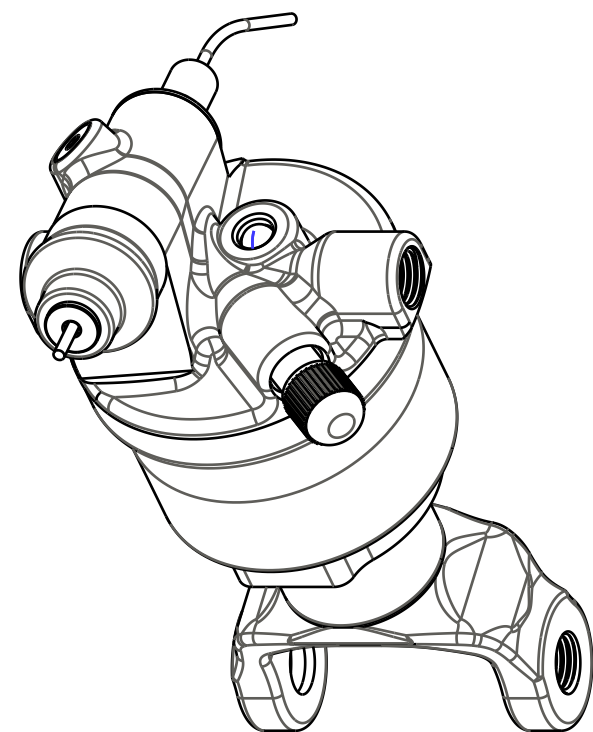

029-03-006
O-Ring (-006) [1.070 C.S. X .114 ID]

CABLE SHOWN FOR ILLUSTRATIVE PURPOSES

210-24-174
Screw [#6-32 X 0.250 TLG]

TORQUE:
7±2 IN LB

010-01-000
Ball [Ø 0.1250] Steel

TORQUE:
7±2 IN LB

018-01-034
Set Screw [#8-32 X 0.125 TLG] Flat Point, SS

010-01-003
Ball [Ø 0.1875] Delrin

(019-01-088)

TORQUE:
3±.25 IN LB

TORQUE:
22±2 IN LB

(210-24-254)

(006-00-020)

TORQUE:
12±1 FT-LB

TORQUE:
90±5 IN-LB

TORQUE:
110±5 IN-LB

010-00-057
Air Valve Parts: Cap, Air Valve [1.305-32], Black, 6061

808-17-380-KIT
Eyelet Assy: 2018 Shapeshifter, Trunnion

229-19-261
Shaft: Shapeshifter, Airtube [1.250 OD, 1.100 TLG], Clear Ano

805-00-107-KIT
Piston Assembly: Shapeshifter, Annular, IFP

809-03-030-KIT
Shaft Assembly: Shapeshifter Inner Body, 82, 15, Clear Ano


806-62-030-KIT
Body Assy: Shapeshifter Middle Body, 82, 15, Black Ano

806-61-020-KIT
Body Assy: Shapeshifter Outer body, 82, 15, Black Ano

213-01-700
Clevis: Lower Trunnion Mount, Shapeshifter [1.25 W, M8 Bolt custom]

SHOCK OIL, 10 WT GREEN

IFP Depth
.110
[2,79]

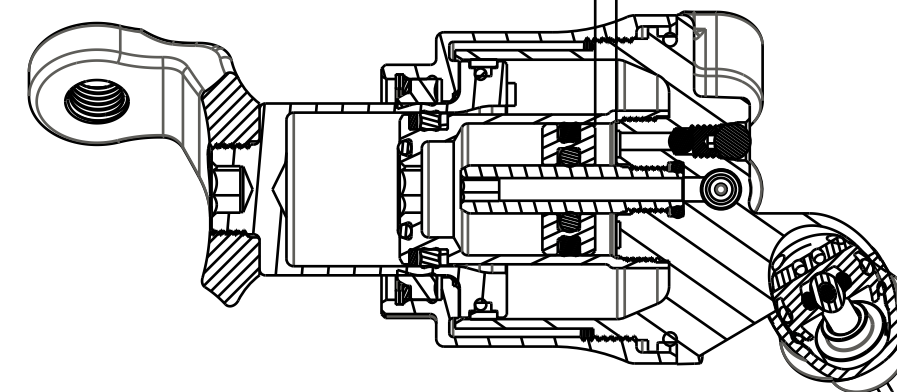

FOX FOX Factory, Inc. Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
2019_18, Shapeshifter, A, 2pos Remote,
Trunnion, Canyon, Strive V2, 82, 15

SIZE DWG. NO.

C

PLOT SCALE 1:1

SHEET 1 OF 1

PROPRIETARY
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

ProE ASSEM