

4

3

2

1

D

D

C


C

B

B

A

A

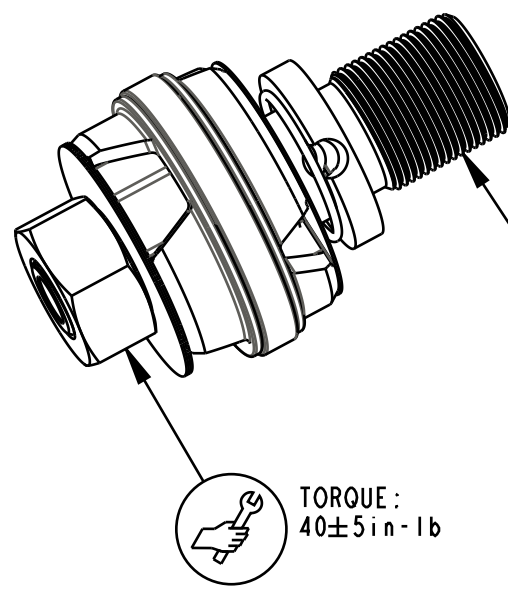

820-03-525-KIT  
2019 Grip, All, Bearing Housing Assy

APPLY BLUE MARINE GREASE  
TO THREADS ON ALUMINUM  
REBOUND NEEDLES ONLY

DAMPER SHAFT

BASE STUD

O-RING

TORQUE:  
40±5in-lb

LOCTITE:  
RED 263, 2-3 DROPS  
360° COVERAGE \*

Ball [Ø.1094]


Spring: Detent [.138 TLG, .087 OD, 48 lb/in]

REBOUND NEEDLE

REBOUND PISTON ASSEMBLIES:  
820-03-591-KIT: 2019 Grip E-Bike Rebound Piston Assy  
820-03-458-KIT: 2017 Grip Rebound Piston Assy, Short Travel

SEE DETAIL Z

O-Ring (-005) [Ø.070 C.S. X Ø.101 ID]

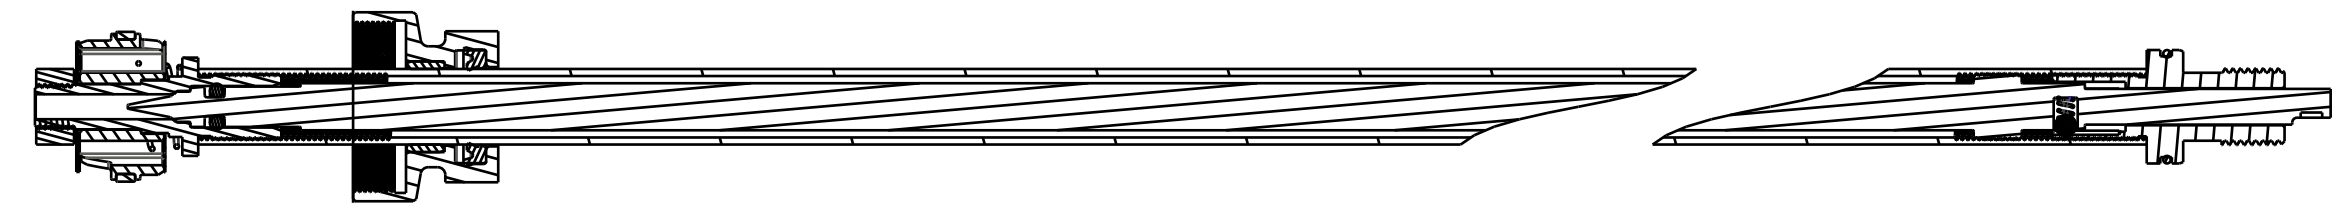

SECTION A-A

- PROPRIETARY -  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

|   |          |   |                  |
|---|----------|---|------------------|
|   |          | <b>FOX Factory, Inc.</b>                  | Ph 831-768-1100  |
| TITLE   |          | 130 Hangar Way, Watsonville, CA 95076 USA | Fax 831-768-9312 |
| <b>2021 34 SC GRIP REMOTE<br/>DAMPER SHAFT ASSEMBLIES</b> |          |   |                  |
| SIZE  | DWG. NO. |   |                  |
| <b>C</b>  |          |   |                  |
| PLOT SCALE  | 1:1      | SHEET 1 OF 1                              |                  |