


4

3

2

1

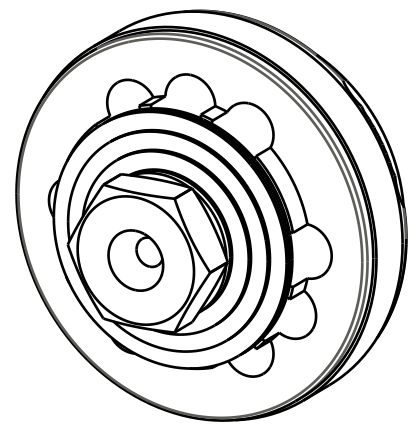

044-04-050
Valve: [.500 OD X .252 ID X .0045 TH]

050-01-017
Plate: [.900 OD X .252 ID X .050 TH]

044-04-060
Valve: [.600 OD X .252 ID X .0045 TH]

044-04-070
Valve: [.700 OD X .252 ID X .0045 TH]

044-10-070
Valve: [.700 OD X .252 ID X .010 TH]

START WITH TWO (2) VALVES IN THIS LOCATION. 1 OR 2 VALVES MAY BE ADDED OR REMOVED TO GET 13-17 REBOUND POSITIONS. THE EXTREME CLOCKWISE POSITION IS ONE.

(044-10-070)

044-04-080
Valve: [.800 OD X .252 ID X .0045 TH]



(044-06-060)

044-06-090
Valve: [.900 OD X .252 ID X .006 TH]

(044-06-050)

805-02-015-KIT
Piston Assy: Damping, RD Adj, 09 VAN R [.940 Bore, .295 TLG] w/ Glyde Ring

044-06-060
Valve: [.600 X .252 X .006]

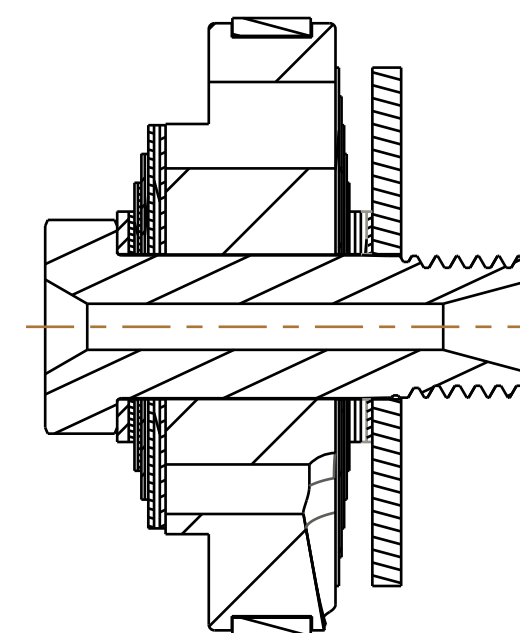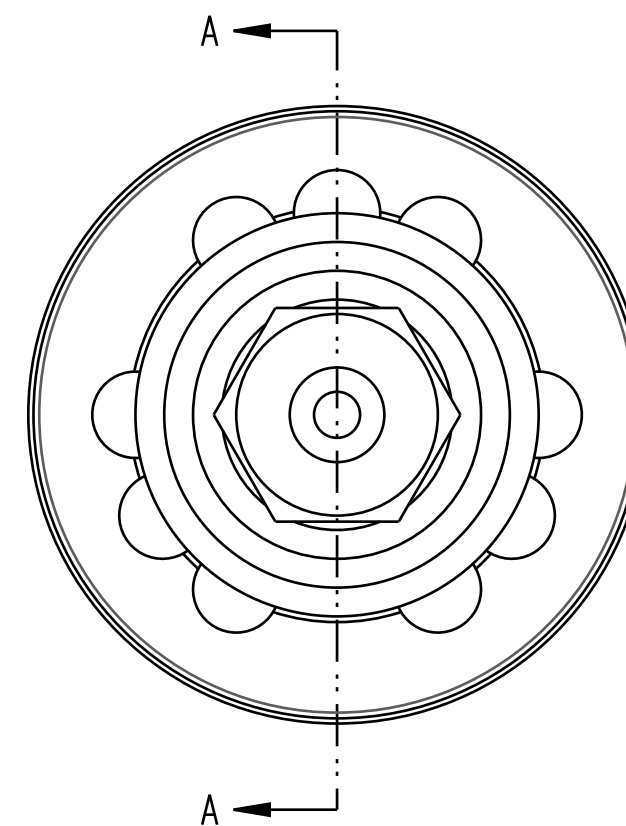

SECTION A-A
SCALE 3:1

044-06-050
Valve: [.500 OD X .252 ID X .006 TH]

044-10-040
Valve: [.400 OD X .252 ID X .010 TH]

050-01-011
Plate: [.400 OD X .252 ID X .020 TH]

210-10-048
Piston Bolt [.1070 Bore, 0.725 SHLG X 0.080 ID X 0.850 TLG]

PROPRIETARY
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX Factory, Inc. Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
Valving Assy: 2011 VAN R_RC,
CL, RM

SIZE DWG. NO. **807-64-020-KIT**

PLOT SCALE | .25:1 | SHEET 1 OF 1

4

3

2

ProE ASSEM